



# NORLYS



# Brightening your life with our passion for light

Inspired by the simplicity and timeless aesthetics of Scandinavian design, we draw from nature to craft lighting fixtures that exude elegance and sophistication. NORLYS products embody the core values of Scandinavian design, embracing minimalism, functionality and enduring beauty. With NORLYS, you can trust that our lighting solutions will effortlessly integrate into any space, elevating its ambiance and leaving a lasting impression.



**30 +** \_\_\_\_\_ years on the market

**300 +** \_\_\_\_\_ team members

**24** \_\_\_\_\_ countries

**5 mln** \_\_\_\_\_ unit sold

# We're focused on our core values

At NORLYS, our values are at the core of everything we do. They shape our culture, inspire our actions, and drive our passion for delivering the best lighting solutions. We believe that by upholding these values, we can make a positive impact on the world of lighting.



## For people

**We're field experts who enjoy sharing knowledge and cherish long lasting customer relationships.**

Commitment to our Clients has been our path for years, and we tread it with confidence. We support with pre-sales advice and information, and we follow up after the purchase. They can count on our openness and professionalism. They can rely on us. We put the Clients at the center of everything we do. We strive to deeply understand their varied needs, to allay fears, and surpass expectations with a wide range of diverse and unique products and services tailored to individual needs.



## Responsibility

**We shape the world with gentle passion, showcasing its beauty in the finest light, because it deserves nothing less.**

We can't operate any other way. We want to leave the world as we found it, with all its beauty and diversity. We responsibly use renewable resources, continuously improve energy-efficient production methods, and create top-quality luminaries with a minimal impact on the environment. Building a responsible and ethical company is a continuous, long-term effort on processes without compromises or half measures.



## Passion for light

**We focus on the future, emphasizing sustainability and our impact on future generations.**

We strive to create extraordinary places, providing unique lighting experiences. By combining cutting-edge innovations, professionalism, enthusiasm, and the experience of our team, we obtain a powerful tool. A tool for extracting the best qualities and meanings from spaces. Our commitment to designing unique and practical lighting solutions enriches and invigorates space.

# Over 30 years of experience

NORLYS is the embodiment of the Scandinavian spirit. It was born in the frosty North in Norway, reflecting its simplicity, resilience, and naturalness. NORLYS is the answer to the long polar nights, the harshness of nature, and the need for safety. That is why we have been lighting spaces for 30 years. It is our passion and mission.

Today our main production plant and stock facilities are established in Poland and Sweden. We have our own aluminium foundry, a press department for the production of steel luminaires, and a hot-dip galvanizing department. Apart from that, we have a machining department which includes CNC machining, a powder-coating department, and assembly departments. Our pride is our own Testing Laboratory equipped with specialised equipment of the highest class for the testing of luminaires. This lab performs measurements according to the requirements specific to ENEC and in accordance with the ISO 17025 standard.

We are an international company. Our subsidiaries located in Norway, Sweden, France, Italy and Poland are accompanied by an extensive worldwide sales network of professional distributors. This year, we are proud to announce that we have achieved the EcoVadis Bronze certification, reaffirming our commitment to sustaina-



Opening the first production hall (1998)



Hot-dip galvanizing plant (2003)




Die casting and tool shop (2011)



New warehouse and assembly (2015)

# How to read the catalogue?

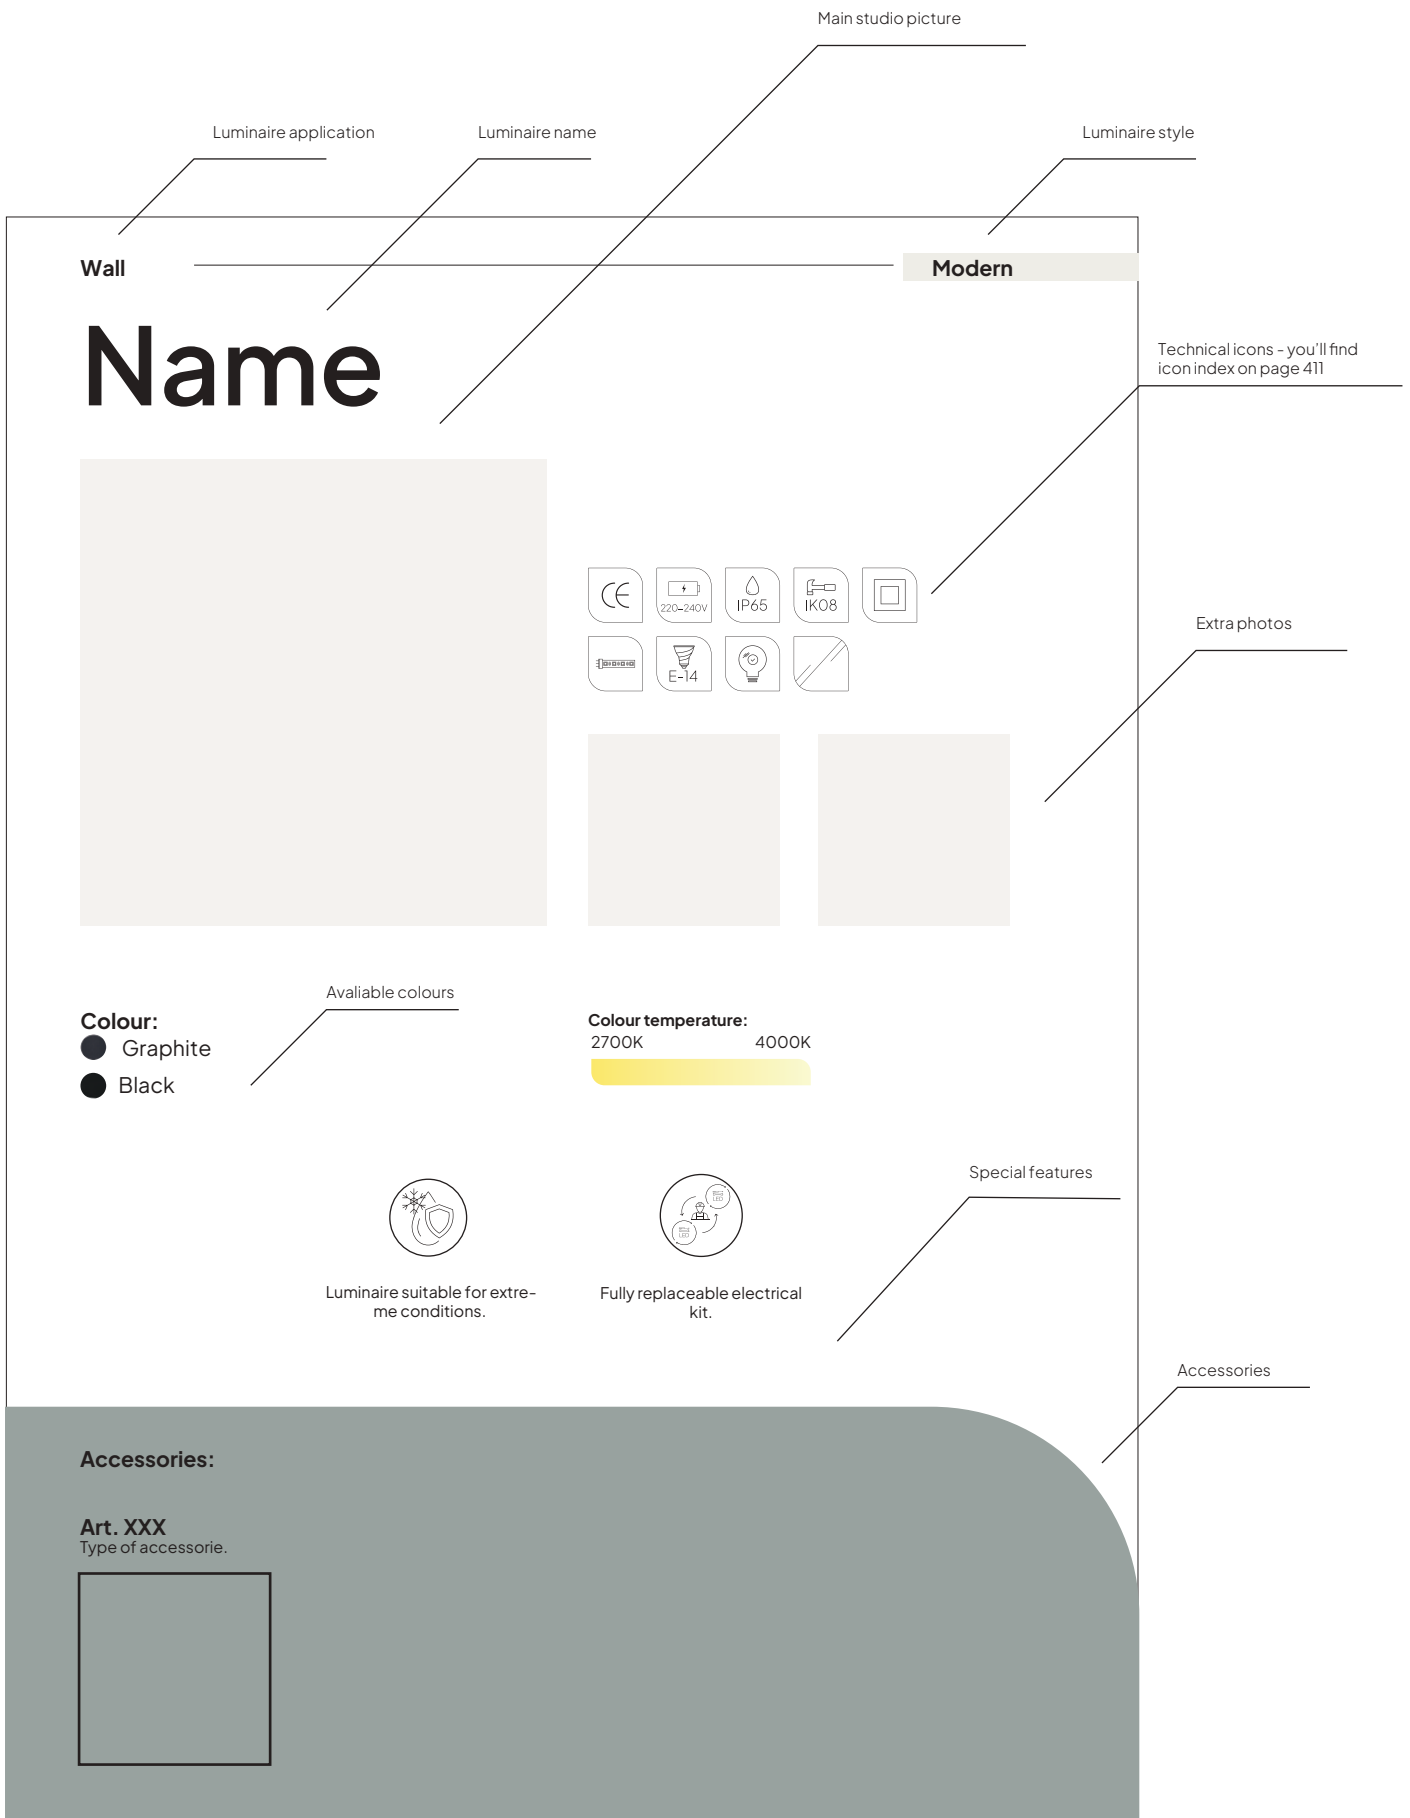

# Families

<b>A</b>	s.43	Alta		s.179	Nice	
	s.19	Arendal		s.161	Nidaros	
	s.13	Arendal Mini		s.157	Nordland	
	s.291	Arvika		s.181	Oppland	
<b>B</b>	s.23	Asker		s.261	Oslo	■
	s.295	Basel	■	s.321	Paris	■
	s.237	Bergen	■	s.409	Poles	
	s.240	Berlin	■	s.187	Rena	
<b>C</b>	s.299	Bern	■	s.403	Rimini	■
	s.303	Boden	■	s.195	Rondane	
	s.345	Bologna	■	s.203	Sande	
	s.51	Borg	■	s.197	Sandvik	
<b>E</b>	s.59	Bornholm	■	s.327	Ski	■
	s.242	Bremen	■	s.201	Skara	
	s.331	Chelsea	■	s.205	Sol	
	s.354	Como	■	s.207	Stavanger	■
<b>F</b>	s.73	Egersund		s.269	Stockholm	■
	s.63	Egersund Mini		s.225	Trysil	
	s.75	Egersund Park		s.329	Vansbro	■
	s.361	Florence		s.217	Vasa	
<b>G</b>	s.81	Geneva		s.401	Venice	
	s.369	Genoa		s.219	Visby	
	s.371	Glasgow		s.213	Voss	
	s.223	Glode				
<b>H</b>	s.85	Grimstad				
	s.97	Halden				
	s.87	Halmstad				
	s.107	Hammerfest				
<b>K</b>	s.99	Hellvik				
	s.103	Hitra				
	s.307	Karlstad	■			
	s.111	Kisa				
<b>L</b>	s.117	Koster				
	s.259	Larvik	■			
	s.387	Latina				
	s.127	Lillehammer				
<b>M</b>	s.131	Lillesand				
	s.245	Lofoten	■			
	s.373	London				
	s.313	Lund	■			
<b>N</b>	s.135	Lysfjord				
	s.317	Mandal	■			
	s.407	Milano				
	s.389	Modena				
	s.141	Molde				
	s.145	Mora				
	s.147	Moss				
	s.167	Namsos				
	s.163	Narvik				

Modern

Classic

Industrial

Loft

# Wall

Arendal



s.15

Asker



s.25

Asker Big



s.29

Basel



s.295

Bergen



s.237

Berlin



s.241

Bern




s.299

Boden




s.303

Bologna



s.345

Bologna



s.345

Borholm




s.59

Bremen



s.243

Chelsea



s.333

Chelsea




s.333

Chelsea



s.335

Como




s.355

Florence



s.361

Geneva




s.81

Genoa



s.369

Genoa Mini



s.369

Glasgow



s.371

Halden



s.97

Hitra



s.103

Karlstad



s.307

Koster



s.119

Larvik



s.259

Latina



s.387

Lillehammer



s.127

Lofoten



s.245

Lofoten



s.247

London



s.373

London



s.377

London Big



s.375

Lund



s.313

Lysfjord



s.135

Mandal



s.317

Modena



s.389

Modena Big



s.390

Molde



s.141

Namsos



s.169

Nordland




s.157

Oslo




s.261

Paris




s.323

Paris Big




s.325

Rimini



s.405

Rondane



s.195

Sandvik



s.197

Sandvik




s.197



Ski



Stockholm



Stockholm



Stockholm Big



Vansbro



Vasa



Venice




Voss




# Bollard


Alta




Alta



Alta



Alta




Arendal




Arendal



Arendal Mini



Arendal Mini




Arvika



Arvika




Asker




Asker



Bologna




Bologna




Borg




Borg




Chelsea



Chelsea Big



Como




Egersund




Egersund




Egersund Mini




Egersund Mini




Egersund Mini



Egersund Mini




Egersund Park



Egersund Park



Florence



Glode



Glode



Stockholm



Halmstad



Halmstad



Halmstad



Halmstad

















Hellvik



<p>Hellvik</p>  <p>s.99</p>	<p>Kisa</p>  <p>s.113</p>	<p>Lillesand</p>  <p>s.131</p>	<p>Lillesand</p>  <p>s.131</p>	<p>Lilesand</p>  <p>s.133</p>	<p>Lilesand</p>  <p>s.133</p>
<p>Lofoten</p>  <p>s.253</p>	<p>Lofoten</p>  <p>s.255</p>	<p>London</p>  <p>s.381</p>	<p>London Big</p>  <p>s.381</p>	<p>Modena Big</p>  <p>s.393</p>	<p>Modena</p>  <p>s.393</p>
<p>Molde</p>  <p>s.143</p>	<p>Molde</p>  <p>s.143</p>	<p>Namsos</p>  <p>s.171</p>	<p>Namsos</p>  <p>s.171</p>	<p>Narvik</p>  <p>s.163</p>	<p>Oppland</p>  <p>s.183</p>
<p>Oppland</p>  <p>s.185</p>	<p>Oslo</p>  <p>s.263</p>	<p>Rimini</p>  <p>s.403</p>	<p>Skara</p>  <p>s.201</p>	<p>Stavanger</p>  <p>s.209</p>	<p>Stavanger</p>  <p>s.209</p>
<p>Stavanger</p>  <p>s.209</p>	<p>Stockholm</p>  <p>s.275</p>	<p>Stockholm</p>  <p>s.275</p>	<p>Stockholm</p>  <p>s.275</p>	<p>Stockholm</p>  <p>s.279</p>	<p>Stockholm</p>  <p>s.279</p>
<p>Stockholm</p>  <p>s.283</p>	<p>Stockholm Big</p>  <p>s.283</p>	<p>Trysil</p>  <p>s.227</p>			

# Pole

<p>Asker</p>  <p>s.37</p>	<p>Asker</p>  <p>s.41</p>	<p>Bologna</p>  <p>s.351</p>	<p>Borg</p>  <p>s.57</p>	<p>Chelsea</p>  <p>s.343</p>	<p>Como</p>  <p>s.359</p>
<p>Egersund Park</p>  <p>s.79</p>	<p>Florence</p>  <p>s.367</p>	<p>Hammerfest</p>  <p>s.107</p>	<p>Karlstad</p>  <p>s.311</p>	<p>Kisa</p>  <p>s.115</p>	<p>Koster</p>  <p>s.123</p>

<p>Lofoten</p>  <p>s.257</p>	<p>London</p>  <p>s.383</p>	<p>London Big</p>  <p>s.383</p>	<p>Lund</p>  <p>s.315</p>	<p>Modena</p>  <p>s.397</p>	<p>Modena Big</p>  <p>s.399</p>
<p>Mora</p>  <p>s.145</p>	<p>Nice</p>  <p>s.179</p>	<p>Oslo</p>  <p>s.265</p>	<p>Poles</p>  <p>s.409</p>	<p>Rimini/ Milano</p>  <p>s.407</p>	<p>Stockholm</p>  <p>s.287</p>
<p>Visby</p>  <p>s.219</p>	<p>Trysil</p>  <p>s.229</p>				

# Ceiling

<p>Bornholm</p>  <p>s.61</p>	<p>Nordland</p>  <p>s.157</p>	<p>Nidaros</p>  <p>s.161</p>	<p>Nidaros</p>  <p>s.161</p>	<p>Nidaros</p>  <p>s.161</p>	<p>Sandvik</p>  <p>s.199</p>
<p>Sol</p>  <p>s.205</p>	<p>Bergen</p>  <p>s.239</p>	<p>Lofoten</p>  <p>s.250</p>	<p>Lofoten</p>  <p>s.250</p>	<p>Lofoten</p>  <p>s.251</p>	<p>Oslo</p>  <p>s.267</p>
<p>Karlstad</p>  <p>s.309</p>	<p>Chelsea</p>  <p>s.341</p>	<p>Florence</p>  <p>s.363</p>	<p>London</p>  <p>s.379</p>	<p>London Big</p>  <p>s.379</p>	<p>Latina</p>  <p>s.385</p>
<p>Modena</p>  <p>s.391</p>	<p>Modena Big</p>  <p>s.391</p>				

# Recessed / Spot

Grimstad



Grimstad



Moss




Moss




Moss




Moss



Moss



Moss



Moss



Moss



Moss



Namsos



Namsos



Namsos Mini



Rena



Rena



Sande



Sande



# Arendal Mini

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. In a modern design combining crystal with steel, the Arendal Mini will work well in a wide variety of space settings. The soft, harmonious light filtered through the satin-finished glass will introduce a pleasant atmosphere wherever it is used. The wall version of the lamp, made of aluminium, will be perfect as entrance lighting.





# Arendal Mini




**Colour:**


- Graphite
- Black

**Colour**

2700K                      4000K




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Fully replaceable electrical kit.



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1251BL	LED	4W	330lm	3000K	> 50 000h	Dimmable
1251GR				4000K		
1252BL						
1252GR						
1250BL	E14	-	-	-	-	-
1250GR						





# Arendal Mini



**Colour:**

- Graphite
- Galvanized
- Black

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Product Eco-friendly.

**Accessories:**


**Art. 204**

Anchoring support



**Art. 203**

Concreting anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1566BL	LED	4W	330lm	3000K	>50 000h	Dimmable
1566GA						
1566GR			345lm	4000K		
1567BL						
1567GA						
1567GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1561BL	LED	4W	330lm	3000K	>50 000h	Dimmable
1561GA						
1561GR			345lm	4000K		
1562BL						
1562GA						
1562GR						



# Arendal

Luminaires that set the mood and highlight the qualities of their surroundings through beautiful light diffusion. Three different heights make it easier to choose the right lamp for the garden path, driveway, terrace or house access. The effect will be even more intriguing when used together in the arrangement. The crystal shade used in the luminaire, additionally satin-finished on the inside, provides a gentle beam of light. Arendal is modern elegance and this design never gets old.






# Arendal




**Colour:**

- Graphite
- Galvanized
- Black


**Colour temperature:**



Luminaire suitable for extreme conditions.



Double corrosion protection (galvanising+powder coating).




Fully replaceable electrical kit.

**Accessories:**


**Art. 205**

Concreting anchor




**Art. 206**

Anchoring support






Art	Type of light source
1560BL	E27
1560GA	
1560GR	



Art	Type of light source
1565BL	E27
1565GA	
1565GR	



Art	Type of light source
1569BL	E27
1569GA	
1569GR	



# Asker

Modern buildings need new solutions. The modern Asker luminaire family is ideally suited to this. Unconventional, minimalist lamps work well on a concrete or brick façade. But of course not only. The minimalist design makes it possible to match them to many variants of wall finishes, and the durable and proven materials used in the lamps guarantee many years of trouble-free use in difficult weather conditions. The lamps are also available in bollard and pole versions. The bold yet simple shapes have always been and will continue to be attractive to professional designers and individual investors alike.







# Asker



**Colour:**


- Graphite
- Aluminium
- Galvanized
- Black
- White

**Colour temperature:**


2700K                      4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1510AL	LED	8W	312lm	3000K	50 000h	Dimmable	
1510BL							
1510GR							
1510WH							
5102AL		8,8W	329lm	4000K			
5102BL							
5102GR							
5102WH							
1720AL		8,4W	798lm	3000K			
1720BL							
1720GR							
1720WH							
5150AL		8,3W	901lm	4000K	>70 000h		DALI2
5150BL							
5150GR							
5150WH							
5160AL	9,9W	852lm	3000K				
5160BL							
5160GR							
5160WH							
1721AL	9,9W	852lm	3000K				
1721BL							
1721GR							
1721WH							
1513AL	E27	-	-	-	-		
1513BL							
1513GR							
1513WH							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1700GA	LED	8,4W	360lm	3000K	50 000h	Dimmable
5100GA			367lm	4000K		
1702GA	E27	-	-	-	-	-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1511AL	LED	8W	156lm	3000K	50 000h	Dimmable	
1511BL							
1511GR							
1511WH							
5103AL		8.8W	164lm	4000K	50 000h		
5103BL							
5103GR							
5103WH							
1726AL		LED	5,4W	429lm	3000K		70 000h
1726BL							
1726GR							
1726WH							
5151AL				444lm	4000K		
5151BL							
5151GR							
5151WH							
5157AL	5,5W		465lm	4000K	70 000h		
5157BL							
5157GR							
5157WH							
1727AL			426lm	3000K		-	
1727BL							
1727GR							
1727WH							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1705GA	LED	8W	165lm	3000K	50 000h	Dimmable
5101GA			183lm	4000K		
1707GA	E27	-	-	-	-	-



# Asker Big



**Colour:**


- Graphite
- Aluminium
- Galvanized
- Black
- White

**Colour temperature:**


2700K 4000K



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

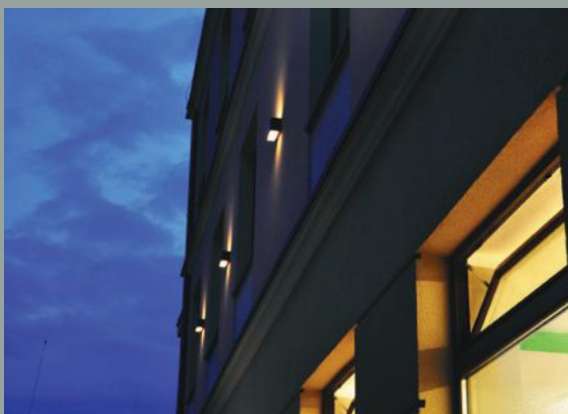




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1300AL	LED	8,3W	547lm	3000K	>72000h	Dimmable
1300BL						
1300GR						
1300WH						
5080AL		19,4W	1669lm	3000K	>72000h	DALI2
5080BL						
5080GR						
5080WH						
5086AL		19,3W	1942lm	4000K	>70000h	DALI2
5086BL						
5086GR						
5086WH						
5018AL		8,5W	550lm	4000K	>70000h	DALI2
5018BL						
5018GR						
5018WH						
1306AL	LED	13,7W	1280lm	3000K	>70000h	Dimmable
1306BL						
1306GR						
1306WH						
5105AL		13,7W	1313lm	4000K	>70000h	Dimmable
5105BL						
5105GR						
5105WH						
1303AL	E27	-	-	-	-	-
1303BL						
1303GR						
1303WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1710GA	LED	7,1W	649lm	3000K	70000h	Dimmable
1712GA	E27	-	-	-	-	-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1302AL	LED	5,2W	306lm	3000K	>70 000h	Dimmable		
1302BL								
1302GR								
1302WH								
5104AL								
5104BL			362lm	4000K				
5104GR								
5104WH								
5106AL							13,6W	656lm
5106BL								
5106GR								
5106WH								
1308AL		8,4W	732lm	3000K	>72 000h			
1308BL								
1308GR								
1308WH								
5085AL						10,2W	843lm	4000K
5085BL								
5085GR								
5085WH								
5087AL								
5087BL	960lm	4000K	>70 000h					
5087GR								
5087WH								
1305AL				E27	-	-	-	-
1305BL								
1305GR								
1305WH								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1717GA	E27	-	-	-	-	-
1715GA	LED	5,3W	347lm	3000K	70 000h	Dimmable





# Asker Bollard




**Colour:**

- Graphite
- Aluminium
- Black

**Colour temperature:**

2700K 4000K



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**

Concreting anchor



**Art. 1908**

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK		
1311AL	LED	9,5W	585lm	3000K	50 000h	-	-	IK10		
1311BL										
1311GR										
1314AL		7,7W	697lm		3000K	> 109 000h	Dimmable	IESNA type II/III	IK08	
1314BL										
1314GR										
1315AL										
1315BL										
1315GR										
1316AL		7,7W	604lm		3000K	> 109 000h	Dimmable	IESNA type V		
1316BL										
1316GR										
1317AL										
1317BL										
1317GR										
1318AL		7,7W	724lm		4000K	> 109 000h	Dimmable	IESNA type II/III		
1318BL										
1318GR										
1319AL										
1319BL										
1319GR										
1320AL		7,7W	617lm		4000K	> 109 000h	Dimmable	IESNA type V		
1320BL										
1320GR										
1322AL										
1322BL										
1322GR										
5210AL		10W	394lm		3000K	> 55 000h	Dimmable	-		IK10
5210BL										
5210GR										
5211AL	457lm		4000K							
5211BL										
5211GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1338AL	LED	9,7W	585lm	3000K	50 000h	PIR
1338BL						
1338GR						
1339AL			640lm	4000K		
1339BL						
1339GR						





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	IK
1310AL	LED	9,5W	585lm	3000K	50 000h	On/Off		IK10
1310BL				4000K				
1310GR								
5120AL								
5120BL			636lm	4000K				
5120GR								
5212AL		10W	394lm	3000K	> 55 000h	Dimmable	IESNA type II/III	IK08
5212BL				4000K				
5212GR								
5213AL								
5213BL			458lm	4000K				
5213GR								
5214AL		7,7W	682lm	3000K	>109 000h	Dimmable	IESNA type V	IK08
5214BL				4000K				
5214GR								
5215AL								
5215BL			654lm	4000K				
5215GR								
5216AL			604lm	3000K				IK08
5216BL				4000K				
5216GR								
5217AL								
5217BL								
5217GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1336AL	LED	9,7W	585lm	3000K	50 000h	PIR
1336BL				4000K		
1336GR						
1337AL						
1337BL			636lm	4000K		
1337GR						




# Asker Pole

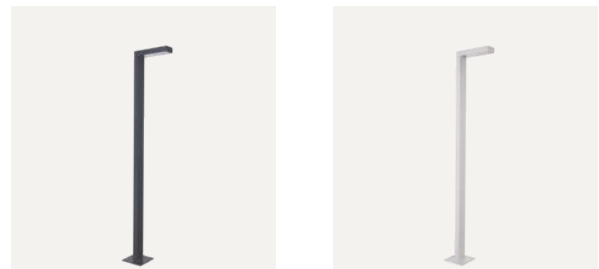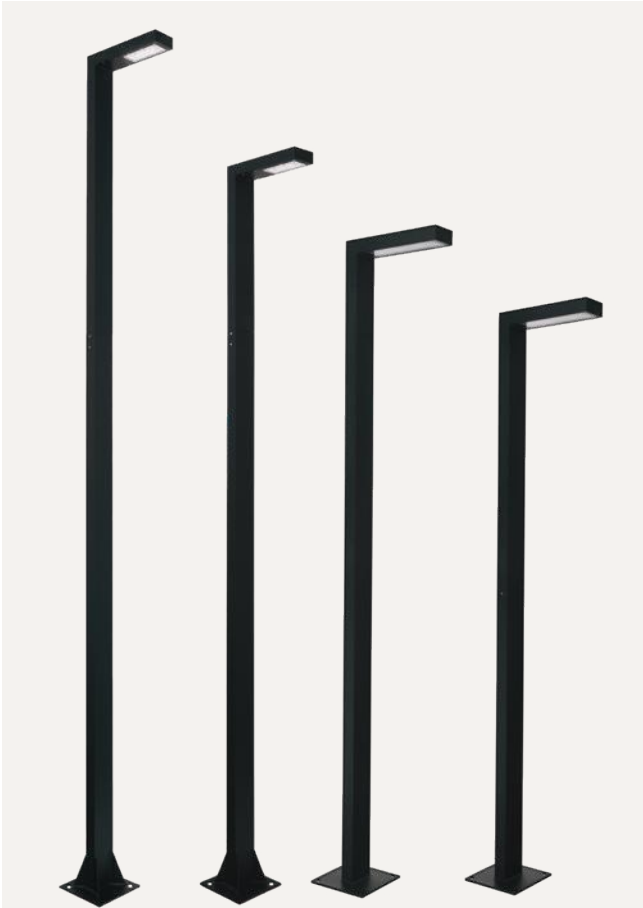

**Colour:**

- Aluminium
- Black
- Graphite

**Colour temperature:**



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 116**  
Concreting anchor  
For 2160 & 2360 height




**Art. 117**  
Anchoring support  
For 2160 & 2360 height.




**Art. 3091**  
Concreting anchor



**Art. B50**  
Foundation



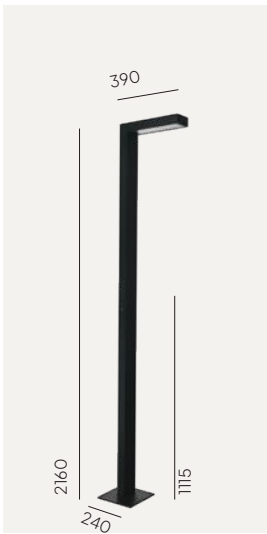



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1360AL	LED	12 W	1128lm	3000K	>72 000h	Dimmable	-
1360BL							
1360GR							
1361AL		8,4W	1081lm		>100 000h	-	IESNA type V
1361BL							
1361GR							
1362AL		8,5W	1081lm			DALI2 / NightDim	
1362BL							
1362GR							
1366AL		8,4W	1018lm		>120 000h	-	IESNA type III
1366BL							
1366GR							
1368AL	8,7W	1018lm	DALI2 / NightDim				
1368BL							
1368GR							

\*All indexes also available in 4000K and 2700K versions.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1364AL	LED	8,4W	1033lm	3000K	>100 000h	-	IESNA typ V
1364BL							
1364GR							
1365AL		8,5W	1085lm		>100 000h	DALI2 / NightDim	
1365BL							
1365GR							
1367AL		8,4W	1018lm			-	
1367BL							
1367GR							
1369AL		8,7W	1081lm		DALI2 / NightDim		
1369BL							
1369GR							

\*All indexes also available in 4000K and 2700K versions.

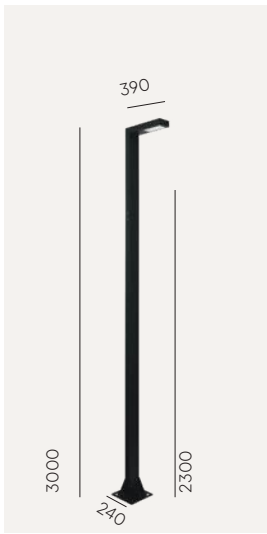

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
5222AL	LED	19,5W	2667lm	3000K	>120 000h	DALI2 / NightDim	IESNA typ V
5222BL							
5222GR							
5224AL			2660lm			Dimmable	
5224BL							
5224GR							
5226AL		>100 000h	DALI2 / NightDim		IESNA typ III		
5226BL							
5226GR							
5228AL			2666lm			Dimmable	
5228BL							
5228GR							

\*All indexes also available in 4000K and 2700K versions.

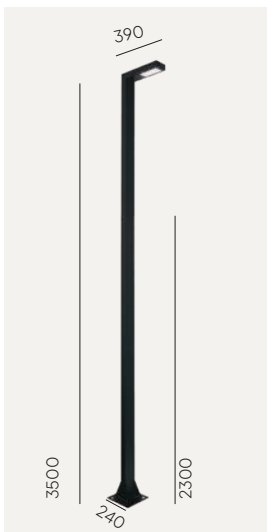


Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
5200AL	LED	19,9W	2620lm	3000K	>120 000h	DALI2 / NightDim	IESNA typ V
5200BL							
5200GR							
5202AL		19,5W	2660lm		>100 000h	Dimmable	
5202BL							
5202GR							
5204AL		>120 000h	DALI2 / NightDim		IESNA typ III		
5204BL							
5204GR							
5206AL			2666lm			Dimmable	
5206BL							
5206GR							

\*All indexes also available in 4000K and 2700K versions.






# Asker Head

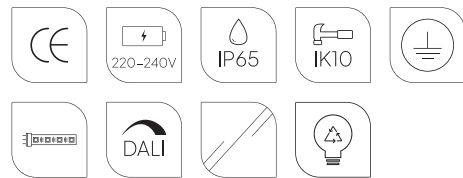


**Colour:**

- Aluminium
- Graphite
- Black

**Colour temperature:**



Fully replaceable electrical kit.



Wide range of light direction adjustment.



Product Eco-friendly.

**Accessories:**

We recommend poles: 1257, 2000, 1277, details on page 409.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4322AL	LED	19,5W	2624lm	3000K	>100 000h	DALI2/ NightDim	IESNA type II/III
4322BL							
4322GR							
4323AL							
4323BL							
4323GR							
4362AL			2711lm	3000K			IESNA type V
4362BL							
4362GR							
4363AL							
4363BL							
4363GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
4332AL	LED	39,8W	5457lm	3000K	>100 000h	DALI2/ NightDim	IESNA type II/III
4332BL							
4332GR							
4333AL							
4333BL							
4333GR							
4372AL			5723lm	3000K			IESNA type V
4372BL							
4372GR							
4373AL							
4373BL							
4373GR							

# Alta

Gardens and terraces are often extension of domestic spaces which require illumination. Oases of greenery and places of respite after daily chores require the right setting. This is where we spend time with family and friends, indulge in garden hobbies or celebrate moments of peace and quiet in solitude. It is worth emphasizing the qualities of our favourite places with gentle light. The Alta lamps, a subtle combination of wood and steel, are perfect for the garden and terrace. The interesting solution of light diffusion gives the desired effect of a sense of calm and harmony. A garden subtly illuminated by Alta luminaires is a tested way to truly relax.





# Alta




**Colour:**

- Black
- Galvanized

**Colour temperature:**

2700K                      4000K




Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
291BL	E27	-	-	-	-	-
291GA						
1475BL	LED E27	8 W	100lm	2700K	25 000h	Dimmable
1475GA						
1479BL	LED	8,5W	146lm	3000K	> 50 000h	
1479GA			151lm	4000K		
5021BL						
5021GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
293BL	E27	-	-	-	-	-
293GA						
1477BL	LED E27	8 W	100lm	2700K	25 000h	Dimmable
1477GA						
1476BL	LED	8,5 W	146lm	3000K	>50 000h	
1476GA			151lm	4000K		
1468BL						
1468GA						

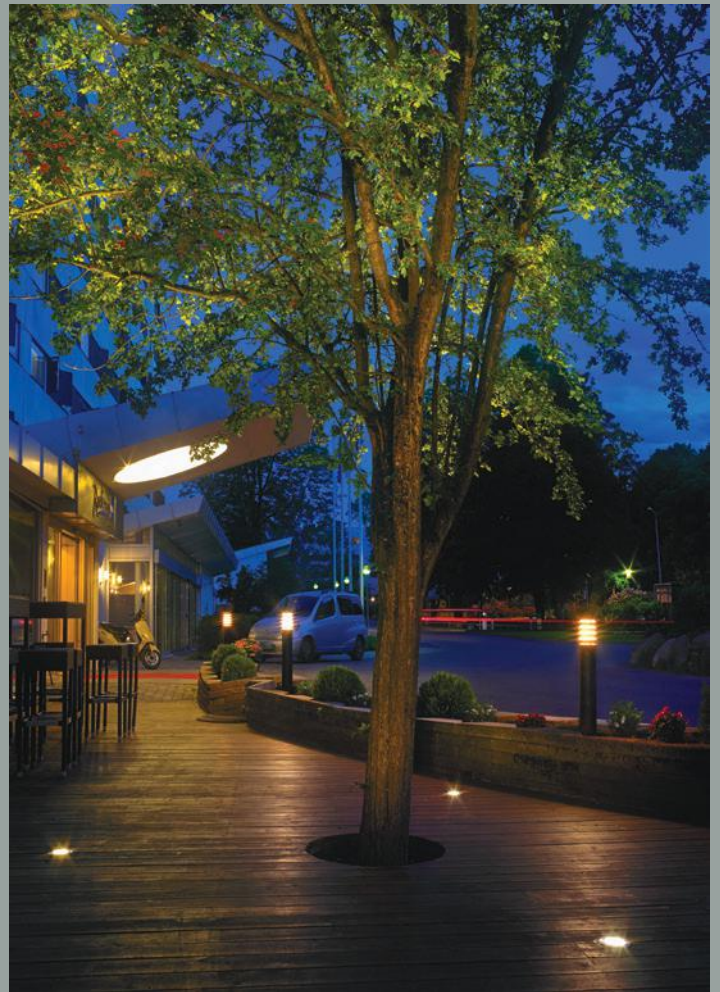






# Alta

scandinavian wood

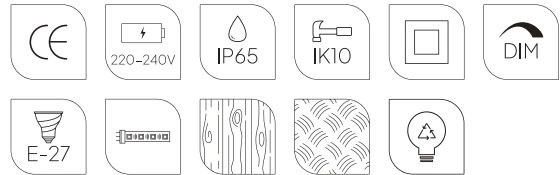

Colour:

- Black
- Galvanized

Colour temperature:




Luminaire housing made of natural wood.




Product Eco-friendly.

Accessories:

**Art. 205**  
Concreting anchor



**Art. 206**  
Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1440BL	E27	-	-	-	-	-
1440GA						
1665BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1665GA				4000K		
1666BL			151lm	4000K		
1666GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1450BL	E27	-	-	-	-	-
1450GA						
1669BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1669GA				4000K		
1670BL			151lm	4000K		
1670GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1443BL	E27	-	-	-	-	-
1443GA						
1673BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1673GA				4000K		
1674BL			151lm	4000K		
1674GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1453BL	E27	-	-	-	-	-
1453GA						
1677BL	LED	8,5W	146lm	3000K	>50 000h	Dimmable
1677GA				4000K		
1678BL			151lm	4000K		
1678GA						

# Borg

The Borg luminaires family is a prime example of top quality and modern design. Borg will prove ideal for designing modern solutions to enhance urban living comfort. The Borg will be a great complement to leisurely, plant-filled squares with benches, but it will also fit in well with the landscape of an ordinary street and completely change its look. For many people, the city is a place to work and live. Therefore, designing comfortable urban landscapes requires the right eye-catching lighting. The minimalist and functional Borg will bring a modern style to any urban space.






# Borg



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 202**

Anchoring support




**Art. 203**

Concreting anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6190AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable	
6190GR				4000K			
6191AL			1396lm	4000K			
6191GR				3000K			
6192AL		17,6W	1358lm	3000K		> 72 000h	DALI2/ NightDim
6192GR				4000K			
6193AL			1396lm	4000K			
6193GR				3000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6180AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable	
6180GR				4000K			
6181AL			1396lm	4000K			
6181GR				3000K			
6183AL		17,6W	1358lm	4000K		> 72 000h	DALI2/ NightDim
6183GR				3000K			
6182AL			1396lm	4000K			
6182GR				3000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6170AL	LED	16W	1358lm	3000K	> 72 000h	Dimmable
6170GR						
6171AL						
6171GR						
6173AL		17,6W	1396lm	4000K		DALI2 / NightDim
6173GR						
6172AL			1358lm	3000K		
6172GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
6120AL	LED	16,1W	1358lm	3000K	> 72 000h	Dimmable	
6120GR							
6121AL		16W	1396lm	4000K			DALI2
6121GR							
6123AL		17,2W	1358lm	3000K			
6123GR							
6122AL		1358lm	3000K				
6122GR							






# Borg



**Colour:**  
 ● Aluminium  
 ● Graphite

**Colour temperature:**  
 2700K      4000K



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

## Accessories:


### Art. 7660


Adapter Ø60 for install on pole Ø76



### Art. 154

Arm for use on wall





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6150AL	LED	32W	3735lm	3000K	> 72 000h	-
6150GR			3928lm	4000K		
5140AL				3735lm		
5140GR		32.6W	3970lm			4000K
5141AL			3735lm	3000K		
5141GR		3970lm		4000K		
5142AL			32.6W	3970lm	4000K	> 72 000h
5142GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens Control
6151AL	LED	32W	2996lm	3000K	> 72 000h	-
6151GR			3069lm	4000K		
5145AL				2953lm		
5145GR		32.6	3194lm			4000K
5146AL				3194lm	4000K	
5146GR		32.6	3194lm			4000K
5147AL				32.6	3194lm	
5147GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6153AL	LED	53W	6900lm	3000K	> 72 000h	DALI2/Night-Dim
6153GR						D4i
6154AL			7200lm	4000K		> 100 000h
6154GR		7200lm				
6155AL			7200lm	4000K	> 100 000h	DALI2/Night-Dim
6155GR		7200lm				4000K
6156AL			7200lm	4000K	> 72 000h	
6156GR						

# Bornholm

Minimalist design, classic shape. In a word, the captivating simplicity and versatility of this lamp, which offers the possibility of many applications. The Bornholm luminaire is durable and long-lasting, and although it is dedicated to external walls, it is just as suitable for a variety of uses indoors. It can be used as a ceiling or wall light. The milky shade minimizes glare, gives evenly spread light and provides comfort to the eye. The Bornholm will be the perfect piece to bring a warm accent to this type of modern interior. It looks great on raw concrete, but will actually be a good complement to any façade or wall.





# Bornholm




**Colour:**

- Aluminium
- White
- Graphite

**Colour temperature:**

2700K 4000K



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
541AL	LED	7,8W	428lm	3000K	>50 000h	Dimmable
541GR						
541WH						
5121AL						
5121GR		443lm	4000K			
5121WH						
544AL		10W	417lm	3000K	50 000h	Motion Detector
544GR						
544WH						
545AL		10,5W	464lm	4000K		
545GR						
545WH						
542AL		17,5W	794lm	3000K	-	
542GR						
542WH						
5122AL			836lm	4000K		
5122GR						
5122WH						

Bornholm can be mounted  
as a ceiling fixture!



# Egersund Mini

Energy efficiency, functionality and aesthetics. This rare combination has been achieved in this particular lamp. Innovation happens when it brings economic benefit.

Undoubtedly innovative product providing efficiency, durability and low energy consumption thanks to the state-of-the-art LED technology fitted to these luminaires.

Durable materials enclosed in a minimalist form and an original reflector in the shape of a metallized cone have given the lamp a completely unique appearance. It will be perfect for gardens, driveways and paths and will be a decoration for both traditional and modern homes.








# Egersund Mini



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1290AL	LED	9,1W	864lm	3000K	> 72.000h	Dimmable
1290GR				4000K		
5117AL			917lm	4000K		
5117GR						
2302AL			864lm	3000K		
2302GR			864lm	3000K		
2303AL	9,6W	934lm	4000K			
2303GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1291AL	LED	9,1W	864lm	3000K	> 72.000h	Dimmable
1291GR				4000K		
5118AL			917lm	4000K		
5118GR						
2314AL			864lm	3000K		
2314GR			864lm	3000K		
2315AL	915lm	4000K				
2315GR						







# Egersund Mini


scandinavian wood



**Colour:**

-  Aluminium
-  Graphite


**Colour temperature:**



Luminaire housing made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2304AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2304GR				4000K		
2305AL			873lm	4000K		
2305GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2308AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2308GR				4000K		
2309AL			873lm	4000K		
2309GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2316AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2316GR				4000K		
2317AL			873lm	4000K		
2317GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2320AL	LED	9,1W	864lm	3000K	72 000h	Dimmable
2320GR				4000K		
2321AL			873lm	4000K		
2321GR						

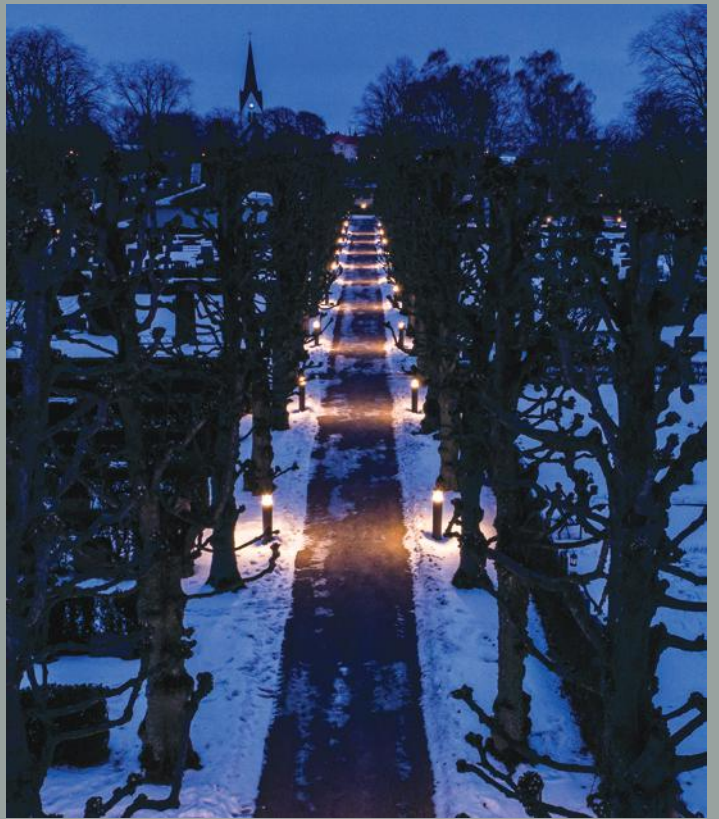






# Egersund



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**

**Art. 1230**  
Concreting anchor



**Art. 1231**  
Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1280AL	LED	20,3W	1681lm	3000K	>162 000h	Dimmable	II
1280GR							
5068AL		21,9W	1681lm	3000K		DALI2 / NightDim	I
5068GR							
5014AL		20,3W	1782lm	4000K		Dimmable	II
5014GR							
5066AL		22W	1782lm	4000K		DALI2 / NightDim	I
5066GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1285AL	LED	22W	1586lm	3000K	>162 000h	Dimmable	II
1285GR							
5069AL		21,9W	1681lm	3000K		DALI2 / NightDim	I
5069GR							
5067AL		1782lm	4000K	DALI2 / NightDim		I	
5067GR							
5015AL		22W	1782lm	4000K		Dimmable	II
5015GR							

# Egersund Park

The world takes on different and better colours in the right light. And if, in addition, the light source is stylish, durable and energy-efficient, then we have a complete success. The luminaires from the Egersund Park family are not only intended for park settings and urban greenery. The versatility of the lamps and the possibility of a variety of applications has already been appreciated by many designers. The lightweight construction, simple shape and warm light, radically changes the perception of the space.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6080AL	LED	9,1W	907lm	3000K	> 72.000h	Dimmable	II
6080GR				4000K			
6081AL			935lm	3000K			
6081GR				4000K			
6082AL		23,9W	2258lm	3000K	> 102.000h	DALI2 / NightDim	I
6082GR				4000K			
6083AL			2319lm	3000K			
6083GR				4000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6090AL	LED	9,1W	907lm	3000K	> 102.000h	Dimmable	II
6090GR				4000K			
6091AL			935lm	3000K			
6091GR				4000K			
6092AL		23,9W	2258lm	3000K	> 102.000h	DALI2 / NightDim	I
6092GR				4000K			
6093AL			2319lm	3000K			
6093GR				4000K			


# Egersund Park



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support








# Egersund Park



**Colour:**

-  Aluminium
-  Graphite

**Colour temperature:**



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.

**Accessories:**


**Art. 6130**

Concreting anchor




**Art. 6132**

Anchoring support 490mm



**Art. 6135**

Electric box



for Art. 6105, 6107, 6113, 6115



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
6105AL	LED	9,1W	907lm	3000K	> 72 000h	Dimmable	II
6105GR			962lm	4000K			
6107AL							
6107GR							
6113AL		23,7W	2239lm	3000K	> 50 000h	DALI2	I
6113GR							
6115AL		23,9W	2314lm	4000K	> 50 000h	Dimmable	II
6115GR							
6117AL		10W	959lm	3000K	> 50 000h	Dimmable	II
6117GR							
6118AL							
6118GR							






# Geneva

Geneva is a fashionable type of lamp, and is popular with designers and individual investors alike. The hallmark of the Geneva wall lamp is the light emitted in two directions.

Using an innovative plane lighting system, the glare effect has been eliminated.

The Geneva lamp is a luminaire with a wide range of applications. It is ideal for illuminating pillars and large wall areas, especially on public buildings. Geneva can also certainly transform the shape of a single-family house, not only with a modern character.

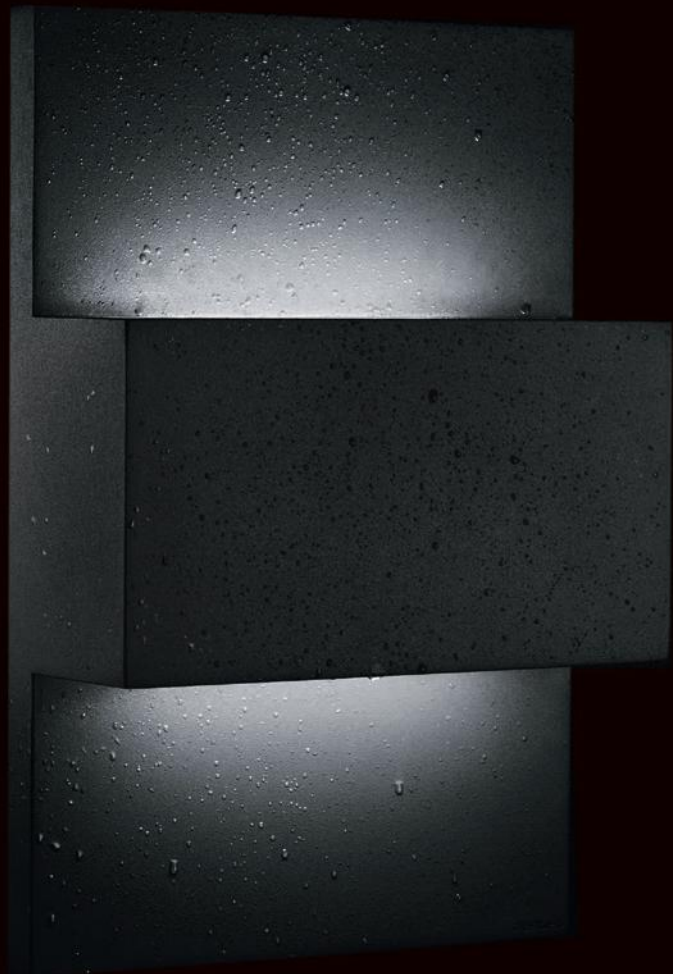





# Geneva



**Colour:**

- Aluminium
- White
- Graphite

**Colour temperature:**




Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1874AL	E27	-	-	-	-	-
1874GR		-	-	-	-	-
1874WH		-	-	-	-	-
1879AL	LED	8,3W	609lm	3000K	> 72 000h	Dimmable
1879GR						
1879WH						
1880AL		8,4W	656lm	4000K		
1880GR						
1880WH						




# Grimstad



**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Product Eco-friendly.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1545AL	LED	8,3W	67lm	3000K	> 100.000h	Dimmable
1545GR						
5025AL		7,4W	72lm	4000K		
5025GR						
1547AL	E14	-	-	-	-	-
1547GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1544AL	LED	5,3W	214lm	3000K	70.000h	Dimmable
1544GR						
1546AL	E14	-	-	-	-	-
1546GR						

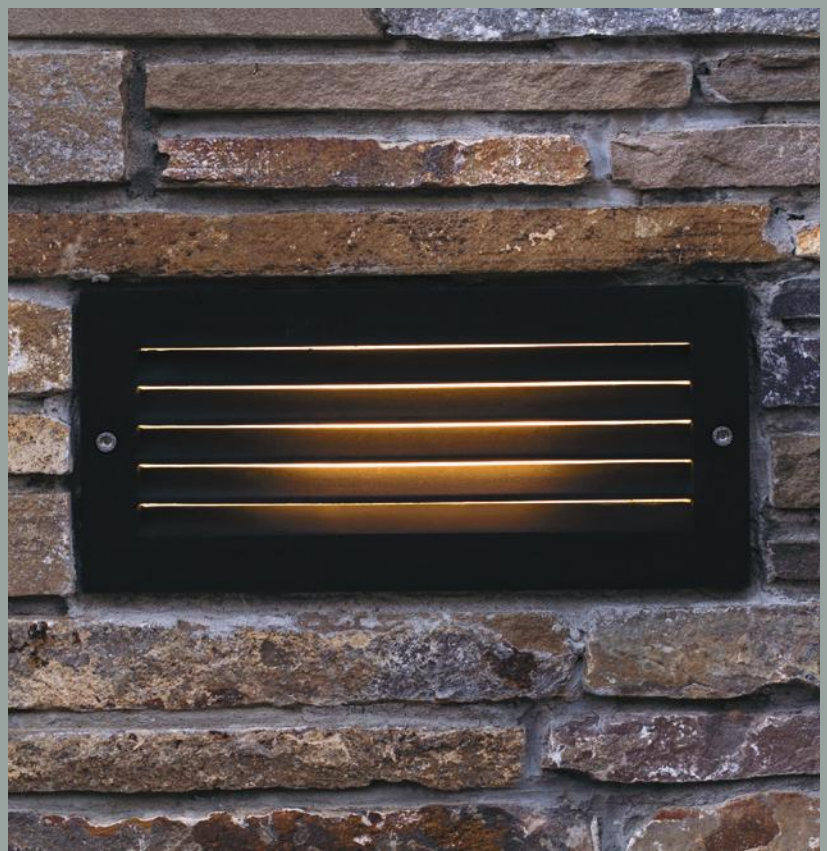

# Halmstad

Thanks to Halmstad luminaires, garden spaces will acquire a unique charm. The bollard made of natural wood and steel works well with shrubs, perennials, stones and, above all, with the wooden architecture of the garden such as arbours, benches, trellises for climbing plants. Lamps in the garden are exposed to snow, sun, frost and moisture. They will serve for as long as possible heavily exposed to the test of time and weather. The elegant design with modern LED technology and the different sizes make it simply worth applying in the garden. The trees will grow larger, the plants will create a life-giving retreat and the reliable Halmstad luminaires will continue to enhance the beauty of the garden.







# Halmstad



**Colour:**

- Black
- Graphite
- Galvanized

**Colour temperature:**



Fully replaceable electrical kit.



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 205**

Concreting anchor




**Art. 206**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
296BL	E27	-	-	-	-	-
296GA						
296GR						
1483BL	LED E27	-	252lm	2700K	25 000h	Dimmable
1483GA						
1483GR						
1482BL	LED	8,5W	292lm	3000K	> 50 000h	
1482GA						
1482GR			310lm	4000K		
5022BL						
5022GA						
5022GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
295BL	E27	-	-	-	-	-
295GA						
295GR						
1488BL	LED E27	8W	252lm	2700K	25 000h	Dimmable
1488GA						
1488GR						
1489BL	LED	8,5W	292lm	3000K	> 50 000h	
1489GA						
1489GR			310lm	4000K		
1346BL						
1346GA						
1346GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
210BL	E27	-	-	-	-	-	II
210GA							
210GR							
212BL	LED E27	-	-	2700K	25 000h	Dimmable	
212GA							
212GR							
211BL	LED	10,5W	295lm	3000K	> 50 000h	-	I
211GA							
211GR							





# Halmstad

scandinavian wood



**Colour:**

- Black
- Galvanized


**Colour temperature:**



Luminaire housing made of natural wood.



Product Eco-friendly.




Fully replaceable electrical kit.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support







Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1410BL	E27	-	-	-	-	-
1410GA						
1356BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1356GA				3000K		
1419BL			292lm	3000K		
1419GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1400BL	E27	-	-	-	-	-
1400GA						
1353BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1353GA				3000K		
1409BL			292lm	3000K		
1409GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1413BL	E27	-	-	-	-	-
1413GA						
1350BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1350GA				3000K		
1417BL			292lm	3000K		
11417GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1403BL	E27	-	-	-	-	-
1403GA						
1347BL	LED	8,5W	310lm	4000K	> 50 000h	Dimmable
1347GA				3000K		
1407BL			292lm	3000K		
1407GA						







# Halden




**Colour:**

- Aluminium
- White
- Graphite

**Colour temperature:**



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
510AL	E27	-	-	-	-	-
510GR						
510WH						
515AL	LED E27	8W	175lm	2700K	25000h	Dimmable
515GR						
515WH						
5096AL	LED	8,4W	662lm	3000K	> 110 000h	DALI2
5096GR						
5096WH						
517AL		8,5W	682lm	4000K	> 110 000h	Dimmable
517GR						
517WH						
5020AL	8,8W	690lm	4000K	> 110 000h	Dimmable	
5020GR						
5020WH						
5097AL	8,8W	696lm	4000K	> 110 000h	DALI2	
5097GR						
5097WH						



# Hellvik

The original bollard luminaire in a fashionable geometric shape will bring an aura of modernity to any private or public space. The Hellvik lamp is hard to pass by indifferently. Available in several sizes, this bollard offers a range of state-of-the-art light sources and controls to suit the most demanding users. Hellvik is the perfect choice for those who want to combine modernity with reliability and exceptional style. This lamp is a frequent choice of designers. The unusual design will work well in a wide variety of settings. Hellvik likes to play a leading role in the space. It likes to attract attention.





# Hellvik




**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

2700K                      4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 209**

Concreting anchor




**Art. 2409**

Anchoring support  
(2 pcs needed)





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
2410AL	LED	11,8W	1014lm	3000K	> 72 000h	Dimmable	II
2410GR			1072lm	4000K			
2411AL							
2411GR							
2412AL		20,2W	1747lm	3000K	> 72 000h	DALI2	I
2412GR			1803lm	4000K			
2413AL							
2413GR							
2414AL		8W	1038lm	3000K	> 100 000h	Dimmable	II
2414GR							
2415AL							
2415GR							
2416AL		11,9W	1537lm	3000K	> 100 000h	DALI2	I
2416GR							
2417AL							
2417GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
2400AL	LED	6,9W	531lm	3000K	> 72 000h	Dimmable	II
2400GR			575lm	4000K			
2401AL							
2401GR							
2402AL		10,1W	670lm	3000K	> 72 000h	DALI2	I
2402GR			808lm	4000K			
2403AL							
2403GR							
2404AL		8W	1038lm	3000K	> 100 000h	Dimmable	II
2404GR							
2405AL							
2405GR							
2406AL		11,9W	1537lm	3000K	> 100 000h	DALI2	I
2406GR							
2407AL							
2407GR							

# Hitra

Functionality is one of NORLYS core design values. That's what Hitra is, simply functional. This is a modern plafond, distinguished by its minimalist design. The luminaire is equipped with a modern and energy-efficient LED light source. The aluminium body ensures durability and resistance to external factors, and the diffuser is made of safety glass. The use of dedicated accessories significantly expands its application possibilities.







# Hitra




**Colour:**


- Aluminium
- White
- Graphite

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**

**Art. 151**

Corner bracket





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
1330AL	LED	9,5W	920lm	3000K	50 000
1330GR				3000K	
1330WH			979lm	4000K	
5114AL				4000K	
5114GR		17,5W	1599lm	3000K	
5114WH				3000K	
1331AL			1717lm	4000K	
1331GR				4000K	
1331WH					
5115AL					
5115GR					
5115WH					




# Hammerfest

A city vibrant with life, yet safe and comfortable is the perfect place for the Hammerfest pole. It refers in style to the classics, but is ultimately thoroughly modern after all. Hammerfest is a modern pole elegant by its minimalism. Thanks to its specially designed luminaire, the lamp has the advantage of illuminating a large area with a harmonious beam of light. Designers of urban spaces have the choice of a satin or milk glass diffuser, with which the urban evening space of streets, parks, promenades and squares can be balanced perfectly. Good lighting does not compete with architecture in the city. The task of successful illumination is to highlight its most significant qualities.





# Hammerfest

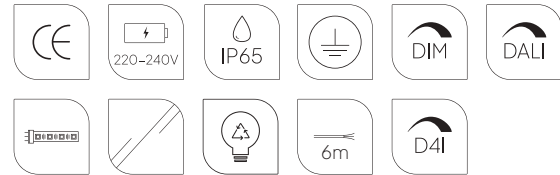

**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 7665**

Adapter Ø60 for install on pole Ø76




**Art. 154**

Arm for use on wall



**Art. 7661**

Electric box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
5135AL	LED	32,3W	3320lm	4000K	> 72 000h	-
5135GR				3000K		DALI2/ NightDim
5136AL		32,5W	3117lm			
5136GR			3310lm	4000K		
5137AL		32,7W	3227lm	3000K	> 50 000h	-
5137GR				3000K		
6141AL						
6141GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
5130AL	LED	32W	3933lm	4000K	> 72 000h	-
5130GR				3000K		DALI2/ NightDim
5131AL		32,5W	3974lm			
5131GR			3721lm	4000K		
5132AL		26,4W	3321lm	3000K	> 54 000h	-
5132GR				3000K		
6140AL						
6140GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
6146AL	LED	53W	6519lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type V
6146GR				4000K			
6148AL						6802lm	
6148GR		6545lm	3000K	D4i			
6147AL			7375lm		4000K		
6147GR							
6149AL							
6149GR							

# Kisa


Proven, robust, practical and at the same time suitable for illuminating the driveway is the Kisa luminaire equipped with the latest LED technology. The Kisa lamp in both bollard and pole versions utilizes a huge range of LED applications, offering several control versions and light directions. Light sources must be glare-free as this is a priority for safety and convenience. In Kisa this is ensured by the milky diffuser, giving an intense but non-glare beam of light. The luminaire is also ideal for energy-saving illumination in garden settings and walkway lighting.







# Kisa

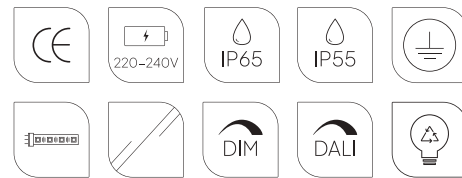


**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
5180AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable
5180GR			1185lm			
5182AL		8,8W		766lm		4000K
5182GR			14,1W			
5181AL		8,8W		766lm	4000K	Dimmable
5181GR			14,1W			
5183GR		14,1W		1222lm	DALI2/ NighDim	
5183GR			14,1W			1222lm





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
5184AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable
5184GR			2432lm			
5186AL		27W		2637lm		4000K
5186GR			13,4W			
5187AL		13,4W		1357lm	DALI2/ NighDim	
5187GR			13,4W			1357lm
5185AL		13,4W		1357lm	DALI2/ NighDim	
5185GR			13,4W			1357lm
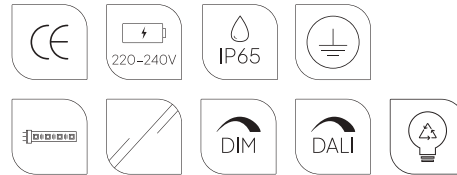
# Kisa Pole



**Colour:**


-  Aluminium
-  Graphite

**Colour temperature:**

2700K 4000K




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 6130**

Concreting anchor




**Art. 6132**

Anchoring support 490mm




**Art. 6133**



**Art. 6135**

Electric box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5190AL	LED	8,8W	706lm	3000K	> 70 000h	Dimmable	
5190GR				4000K			
5191AL			766lm	3000K			DALI2/ NightDim
5191GR				4000K			
5192AL		14,1W	1185lm	3000K			
5192GR				4000K			
5193AL			1222lm	3000K			
5193GR				4000K			



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
5194AL	LED	13,4W	1274lm	3000K	> 70 000h	Dimmable	
5194GR				4000K			
5195AL			1357lm	3000K			DALI2/ NightDim
5195GR				4000K			
5196AL		27W	2432lm	3000K			
5196GR				4000K			
5197AL			2637lm	3000K			
5197GR				4000K			


# Koster

The classics have always had, have and will always have their followers. The Koster lamp family is a proposal for universal lighting. Koster is a group of luminaires with a universal design characterised by a symmetrical light distribution. This design seems to tame the space, introducing calmness and predictability. The Koster luminaire can be used on the outside façade of a building, in the garden, next to a pavement. There are indeed many possibilities. It is available in a wall and two column variants - single and double.





# Koster

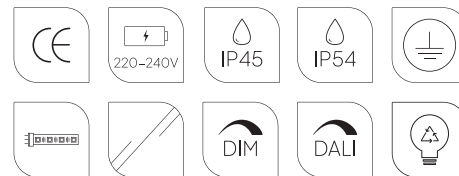


**Colour:**

- Aluminium
- Graphite

**Colour temperature:**



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 158**

Corner bracket







Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP	Lens
724AL	E27	-	-	-	-	-	IP54	-
724GR		-	-	-	-	-		
725AL	LED	9,5W	872lm	3000K	50 000h	-	IP54	-
725GR		17,5W	1568lm					
1912AL			16,9W	1625lm				
1912GR		2090lm		4000K	>100 000h	Dimmable	IP45	
5004AL			2007lm					3000K
5004GR		2747lm		4000K	>120 000h	DALI2/ NightDim	IP45	
1834AL			2718lm					4000K
1834GR		2718lm		4000K	>120 000h	DALI2/ NightDim	IP45	
1814AL			2718lm					4000K
1814GR		2718lm		4000K	>120 000h	DALI2/ NightDim	IP45	
1822AL	2718lm		4000K					>120 000h
1822GR		2718lm		4000K	>120 000h	DALI2/ NightDim	IP45	
1842AL	2718lm		4000K					>120 000h
1842GR		2718lm		4000K	>120 000h	DALI2/ NightDim	IP45	





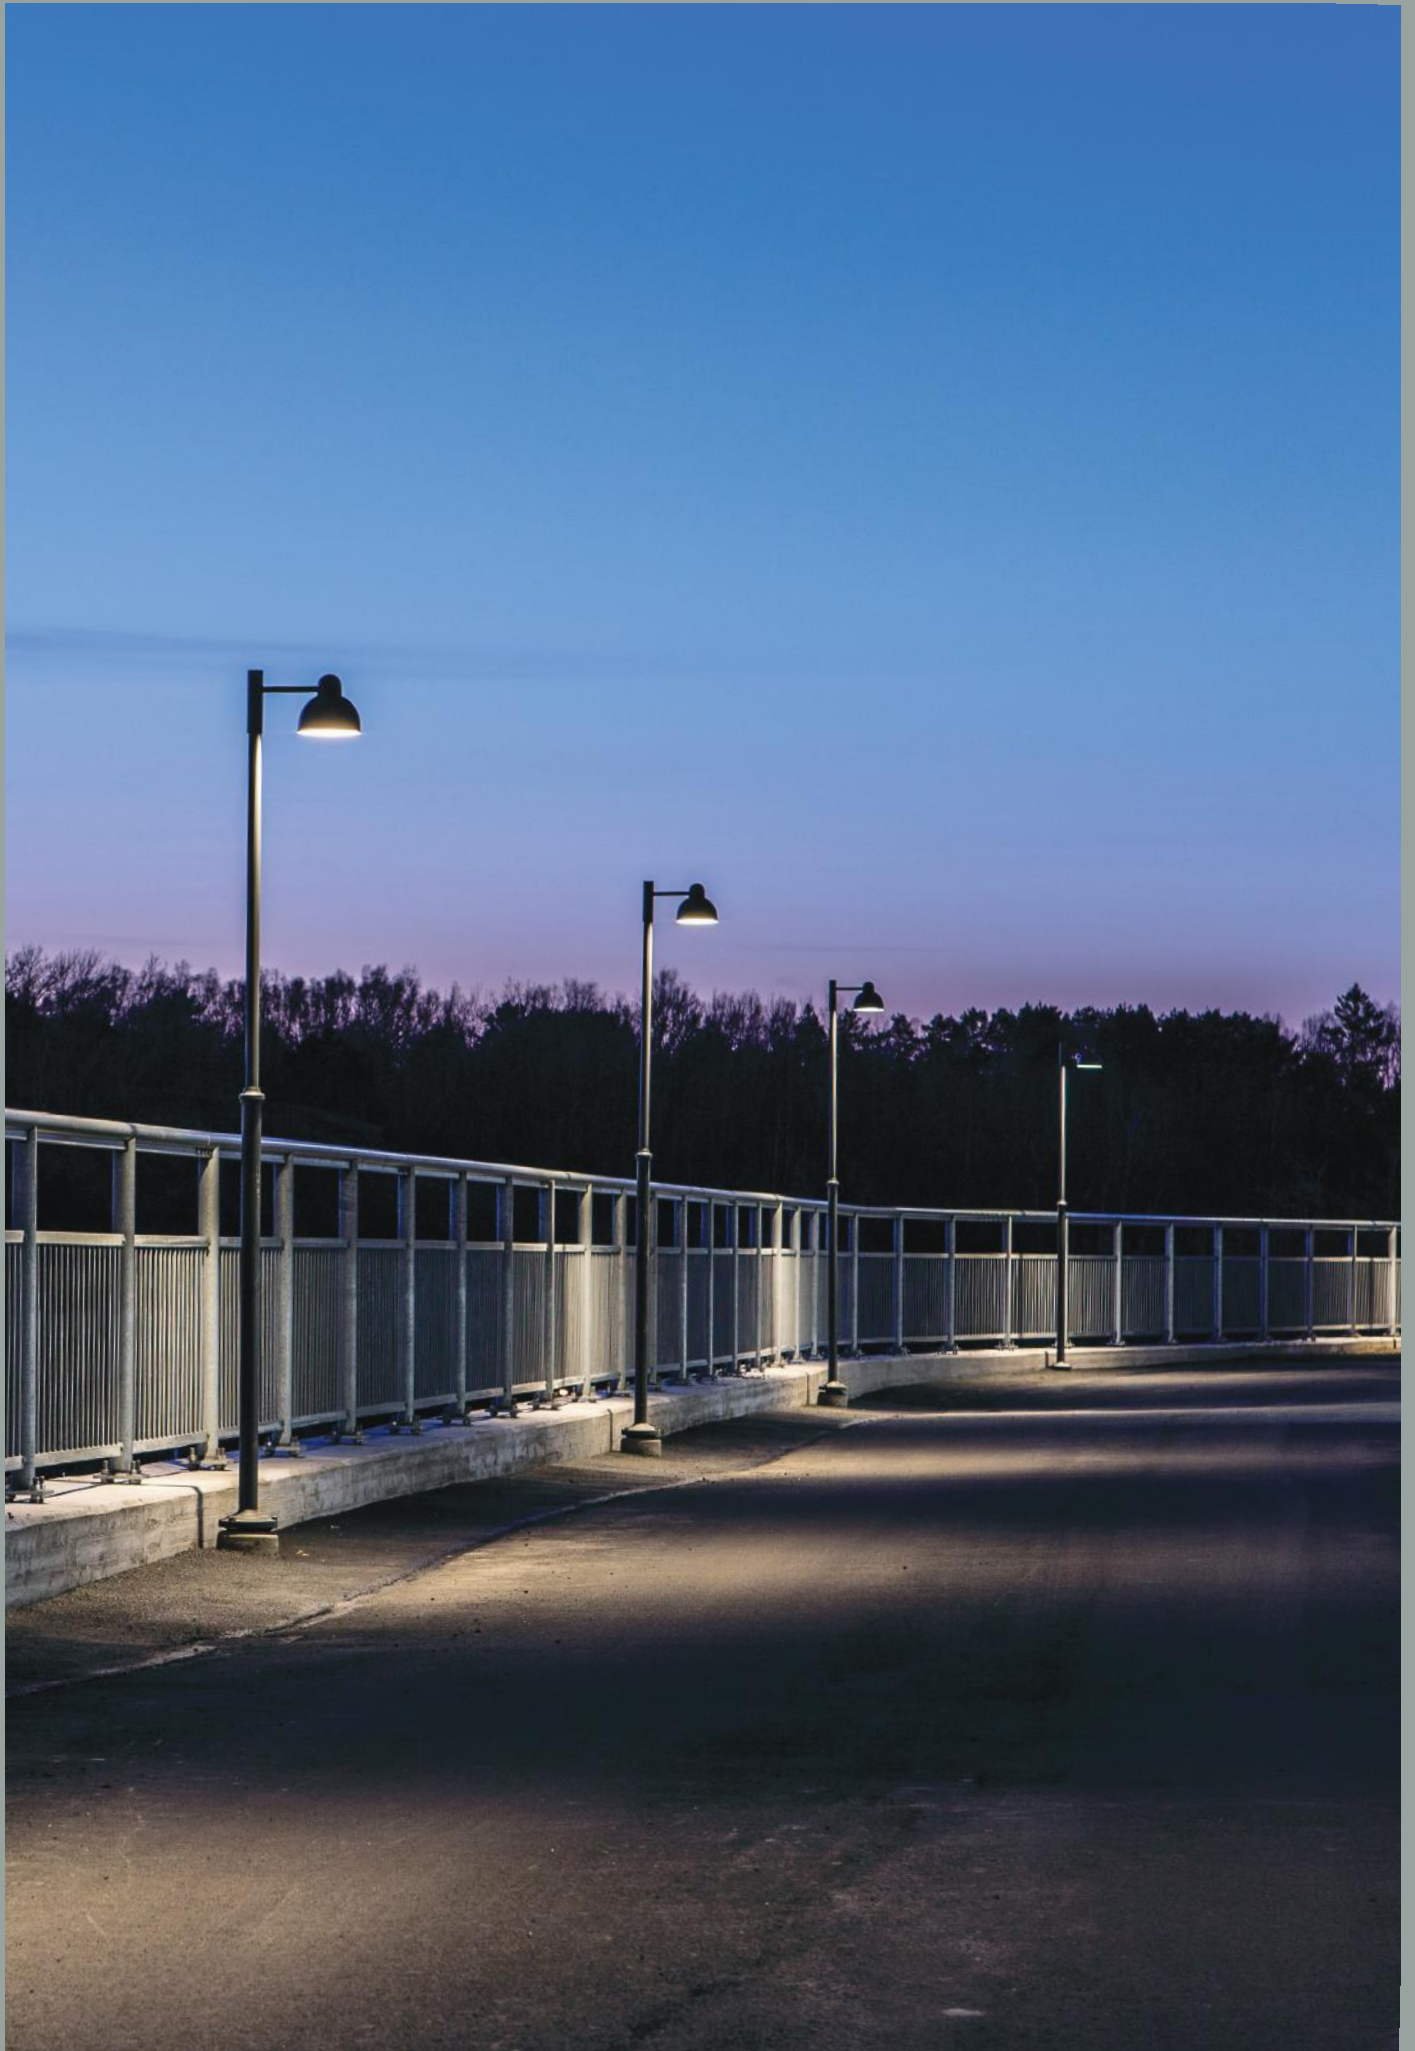

# Koster Pole



**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

- 2700K
- 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 7660**

Adapter Ø60 for mounting on pole Ø76




**Art. 405**

Concreting anchor




**Art. 406**

Anchoring support







Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens		
1155AL	E27	-	-	-	-	-				
1155GR										
1157AL	LED	35W	3136lm	3000K	> 50 000h	-	I	-		
1157GR			3250lm	4000K						
1159AL		34W	3422lm	3000K	> 120 000h	Dimmable	II			
1159GR			3624lm	4000K						
1165AL	LED	34W	3422lm	3000K				> 120 000h	Dimmable	II
1165GR			3624lm	4000K						
1167AL		37W	3654lm	3000K	-	DALI2/ NightDim	I			
1167GR			3825lm	4000K						
1173AL										
1173GR										
1175AL										
1175GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class	Lens			
1177AL	E27	-	-	-	-	-					
1177GR											
1179AL	LED	35W	3136lm	3000K	> 50 000h	-	I	-			
1179GR			3250lm	4000K							
1181AL	LED	34W	3422lm	3000K	> 120 000h	Dimmable	II	IESNA type V			
1181GR			3624lm	4000K							
1187AL		37W	3654lm	3000K					-	DALI2/ NightDim	I
1187GR			3825lm	4000K							
1189AL											
1189GR											
1195AL											
1195GR											
1197AL											
1197GR											



# Lillehammer




**Colour:**

- Aluminium
- Graphite
- Black
- White


**Colour temperature:**



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Multiple light variants.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1580AL	LED	7,3W	126lm	3000K	> 102 000h	Dimmable
1580BL						
1580GR						
1580WH						
5027AL			130lm	4000K		
5027BL						
5027GR						
5027WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1581AL	LED	7,3W	216lm	3000K	> 102 000h	Dimmable
1581BL						
1581GR						
1581WH						
5028AL			231lm	4000K		
5028BL						
5028GR						
5028WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1582AL	LED	4W	107lm	3000K	> 102 000h	Dimmable
1582BL						
1582GR						
1582WH						
5029AL			112lm	4000K		
5029BL						
5029GR						
5029WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1583AL	LED	7,3W	34lm	3000K	> 102 000h	Dimmable
1583BL						
1583GR						
1583WH						
5030AL			38lm	4000K		
5030BL						
5030GR						
5030WH						







Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1584AL	LED	4W	17lm	3000K	> 102 000h	Dimmable
1584BL						
1584GR						
1584WH						
5031AL			18lm	4000K		
5031BL						
5031GR						
5031WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1585AL	LED	4W	17lm	3000K	> 102 000h	Dimmable
1585BL						
1585GR						
1585WH						
1586AL			18lm	4000K		
1586BL						
1586GR						
1586WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1587AL	LED	4W	108lm	3000K	> 102 000h	Dimmable
1587BL						
1587GR						
1587WH						
1588AL			135lm	4000K		
1588BL						
1588GR						
1588WH						





# Lillesand

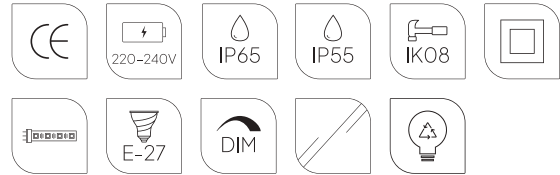

**Colour:**



Aluminium




Graphite


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1380AL	E27	-	-	-	-	-	IP55
1380GR							
1382AL	LEDE27	8W	495lm	2700K	25 000	-	
1382GR							
2330AL	LED	9,2W	897lm	3000K	> 72 000h	Dimmable	IP65
2330GR							
2331AL			956lm	4000K			
2331GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	IP
1383AL	E27	-	-	-	-	-	IP55
1383GR							
1384AL	LEDE27	8W	495lm	2700K	25 000	-	
1384GR							
2342AL	LED	9,2W	897lm	3000K	> 72 000h	Dimmable	IP65
2342GR							
2343AL			956lm	4000K			
2343GR							

# Lillesand

scandinavian wood

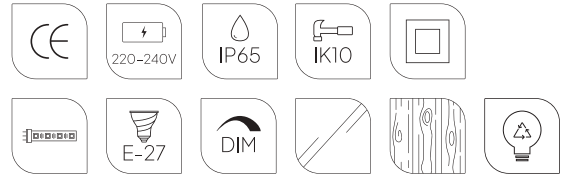

Colour:

- Aluminium
- Graphite


Colour temperature:



Luminaire housing is made of natural wood.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 205


Concreting anchor



Art. 206

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2334AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2334GR				4000K		
2335AL			956lm	4000K		
2335GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2338AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2338GR				4000K		
2339AL			956lm	4000K		
2339GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2346AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2346GR				4000K		
2347AL			956lm	4000K		
2347GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2350AL	LED	9,2W	897lm	3000K	72 000h	Dimmable
2350GR				4000K		
2351AL			956lm	4000K		
2351GR						

# Lysfjord


This wall fixture can be a real discovery for designers of urban spaces and individual investors. We have used innovative configurable lens systems that allows for original lighting effects. The Lysfjord luminaire, although simple in shape can conjure up an extraordinary atmosphere. The various options for setting the angle of incidence of wide or focused light rays, give a very wide range of possibilities for shaping the space with light. Outstanding quality from NORLYS including aluminium, safety glass, reliable and long-lasting LED.







# Lysfjord

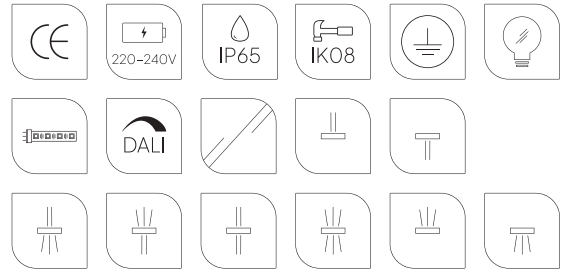

**Colour:**


-  Aluminium
-  Graphite
-  Black
-  White

**Colour temperature:**


2700K                      4000K



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6401AL	LED	14,6W	39lm	3000K	> 70 000h	DALI2/ NightDim
6401BL						
6401GR						
6401WH						
6421AL			37lm	4000K		
6421BL						
6421GR						
6421WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6402AL	LED	26,5W	946lm	3000K	> 70 000h	DALI2/ NightDim
6402BL						
6402GR						
6402WH						
6422AL				4000K		
6422BL						
6422GR						
6422WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6403AL	LED	26,5W	1814lm	3000K	> 70 000h	DALI2/ NightDim
6403BL						
6403GR						
6403WH						
6423AL				4000K		
6423BL						
6423GR						
6423WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6404AL	LED	26,5W	78lm	3000K	> 70 000h	DALI2/ NightDim
6404BL						
6404GR						
6404WH						
6424AL				4000K		
6424BL						
6424GR						
6424WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6405AL	LED	26,5W	946lm	3000K	> 70 000h	DALI2/ NightDim
6405BL						
6405GR						
6405WH						
6425AL						
6425BL						
6425GR						
6425WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6406AL	LED	14,6W	39lm	3000K	> 70 000h	DALI2/ NightDim
6406BL						
6406GR						
6406WH						
6426AL						
6426BL						
6426GR						
6426WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6407AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim
6407BL						
6407GR						
6407WH						
6427AL						
6427BL						
6427GR						
6427WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6408AL	LED	14,6W	998lm	3000K	> 70 000h	DALI2/ NightDim
6408BL						
6408GR						
6408WH						
6428AL						
6428BL						
6428GR						
6428WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2026AL	LED	8W	386lm	3000K	50 000	Dimmable
2026GR						
2027AL			438lm	4000K		
2027GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
2028AL	LED	8W	386lm	3000K	50 000	PIR
2028GR						
2029AL			438lm	4000K		
2029GR						



# Molde

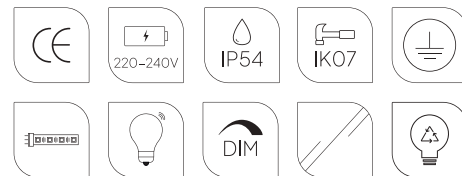

**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



# Molde



**Colour:**



Aluminium



Graphite


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**

Concreting anchor




**Art. 1908**


Anchoring support



**Art. 3081**

Special foot





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1901AL	LED	8W	386lm	3000K	50 000	Dimmable
1901GR				4000K		
5107AL			438lm	4000K		
5107GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1970AL	LED	8,2W	386lm	3000K	> 55 000h	PIR
1970GR				4000K		
1972AL			438lm	4000K		
1972GR						





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1903AL	LED	8W	386lm	3000K	50 000	Dimmable
1903GR				4000K		
1904AL			438lm	4000K		
1904GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Motion Detector
1971AL	LED	8,2W	386lm	3000K	> 55 000h	PIR
1971GR				4000K		
1973AL			438lm	4000K		
1973GR						



# Mora

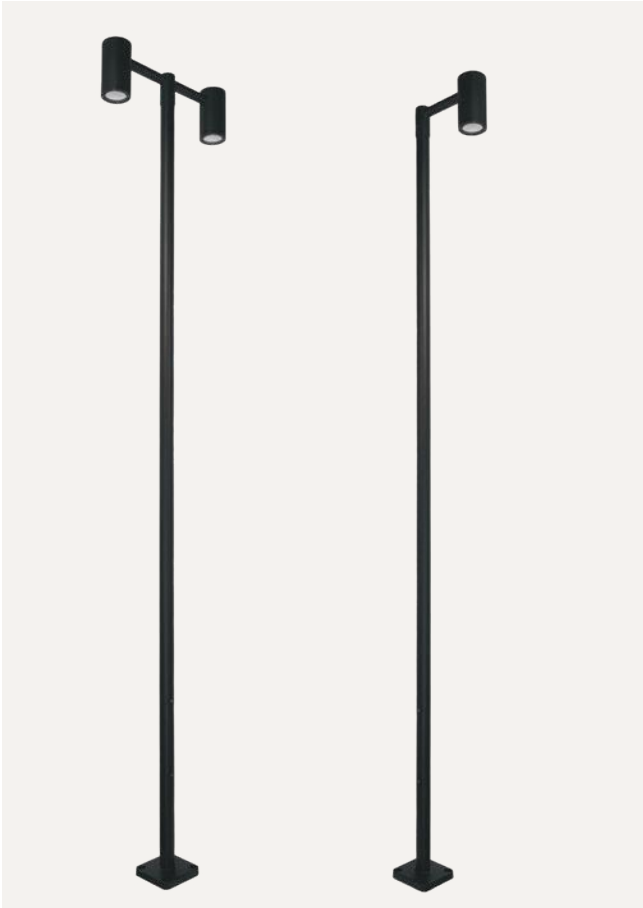

**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

2700K 4000K



Product Eco-friendly.




Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 7661**  
Electric box



**Art. 7662**  
Pole connector.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6466AL	LED	33,9W	3229lm	3000K	> 110 000h	DALI2/ NigthDim
6466GR				4000K		
6467AL		33,5W	3437lm	3000K		
6467GR				4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6460AL	LED	17,6W	1626lm	3000K	> 110 000h	DALI2/ NigthDim
6460GR				4000K		
6461AL			1735lm	4000K		
6461GR						

# Moss

Moss spotlights combine a simple form with small dimensions. They are ideal for illuminating small architecture, individual trees or other elements of the garden layout important to the owner. Thanks to their small size, Moss can be hidden and the light will be the main feature. The undoubted strengths of this family of luminaires, thanks to the innovative use of a phase dimming system, are the ability to select the power, colour and brightness adjustment of the light source. The luminaires in the Moss family offer angle adjustment and versatility through a variety of mounting options. These include ceiling-mounted, pole-mounted, portable, driven into the ground and free-standing bollards variants.





# Moss





**Colour:**

- Black
- Graphite

**Colour temperature:**


2700K 4000K

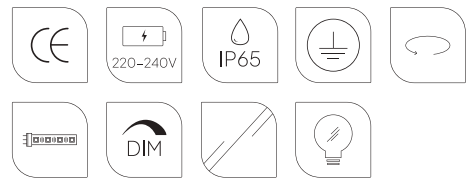

Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Wide range of light direction adjustment.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6161BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6161GR			414lm	4000K		
6162BL						
6162GR						
6163BL		8W	686lm	3000K		
6163GR			749lm	4000K		
6164BL						
6164GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6772BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6772GR						
6778BL		4W	389lm			
6778GR						

\*All indexes also available in 4000K and 2700K versions.



205

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Clamp
6732BL	LED	4W	389lm	3000K	> 50 000h	Dimmable	Ø50
6732GR							
6750BL		8W	686lm				
6750GR							
6735BL		4W	389lm				Ø60
6735GR							
6753BL		8W	686lm				
6753GR							
6738BL		4W	389lm				Ø76
6738GR							
6756BL		8W	686lm				
6756GR							

\*All indexes also available in 4000K and 2700K versions.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6702BL	LED	8W	686lm	3000K	> 50 000h	Dimmable
6702GR						
6706BL		4W	389lm			
6706GR						

\*All indexes also available in 4000K and 2700K versions.

# Moss



**Colour:**

- Black
- Graphite

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

**Accessories:**


**Art. 145**

Hermetic IP68 box with 3 lines




**Art. 6729**

Head mount






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6165BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6165GR			414lm	4000K		
6166BL						
6166GR						
6167BL		8W	686lm	3000K		
6167GR			749lm	4000K		
6168BL						
6168GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6602BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6602GR			414lm	4000K		
6603BL						
6603GR						
6600BL		8W	686lm	3000K		
6600GR			749lm	4000K		
6601BL						
6601GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6473BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6473GR						
6471BL		8W	686lm			
6471GR						

\*All indexes also available in 4000K and 2700K versions.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6485BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6485GR						
6483BL		8W	686lm			
6483GR						

\*All indexes also available in 4000K and 2700K versions.



# Moss




**Colour:**

- Black
- Graphite
- Stainless Steel

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).




Wide range of light direction adjustment.

**Accessories:**


**Art. 145**

Hermetic IP68 box with 3 lines



**Art. 146**

8-way connection box IP68





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6346BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6346GR						
6346ST						
6352BL			414lm			
6352GR						
6352ST						
6376BL		8W	749lm	4000K		
6376GR						
6376ST						
6370BL			686lm	3000K'		
6370GR						
6370ST						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
6355BL	LED	4W	389lm	3000K	> 50 000h	Dimmable
6355GR						
6355ST						
6361BL			414lm			
6361GR						
6361ST						
6385BL		8W	749lm	4000K		
6385GR						
6385ST						
6379BL			686lm	3000K		
6379GR						
6379ST						

# Moss





**Colour:**

- Black
- Graphite
- Stainless Steel

**Colour temperature:**


2700K 4000K

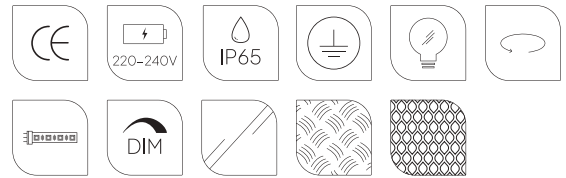

Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Wide range of light direction adjustment.



# Nordland



Colour:

- Aluminium
- White
- Graphite

Colour

2700K 4000K



Product Eco-friendly.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).












# Nidaros

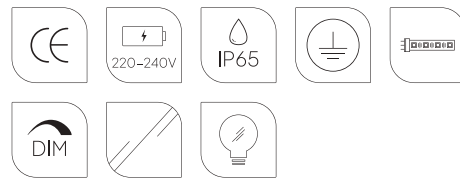

**Colour:**


-  Aluminium
-  Graphite
-  Black
-  White

**Colour temperature:**

2700K                      4000K




Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2122AL	LED	8,3W	765lm	3000K	> 50 000h	Dimmable
2122BL						
2122GR						
2122WH						
2125AL		8,5W		4000K	50 000h	
2125BL						
2125GR						
2125WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2121AL	LED	7,8W	765lm	3000K	>110 000h	Dimmable
2121BL						
2121GR						
2121WH						
2124AL		8,5W		4000K	50 000h	
2124BL						
2124GR						
2124WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2120AL	LED	10,7W	631lm	3000K	50 000h	Dimmable
2120BL						
2120GR						
2120WH						
2123AL				4000K		
2123BL						
2123GR						
2123WH						

# Narvik

It looks robust and it really is. This bollard is a luminaire with a legendary durability that will cope perfectly with any weather conditions. The path leading to the gate, the terrace where we spend long summer evenings, the driveway - the Narvik bollard will work everywhere. The ingeniously designed diffuser emits a rotationally symmetrical stream of light, and thanks to the use of the latest technology, the luminaire provides a maximum field of illumination in relation to its size. Narvik is the ideal solution for modern architecture. It is also available in a PRO version, which, with half the power of the luminaire compared to the basic model, provides 30% more light output.





# Narvik



**Colour:**




**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Vandal-resistant luminaire.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 505**

Concreting anchor



**Art. 110**

Ground anchor





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
557AL	LED	21,8W	556lm	3000K	> 110 000h	-
557GR						-
5091AL		22,5W	597lm	3000K		DALI2/ NightDim
5091GR						-
5024GR		21,8W	564lm	4000K	> 50 000h	-
5024GR						-
5090GR			582lm	4000K	> 50 000h	DALI2/ NightDim
5090GR						-



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
1735AL	LED	22,2W	1122lm	3000K	> 72 000h	DALI2/ NightDim			
1735GR						-			
1850AL						13,4W	666lm	3000K	-
1850GR									-
559AL		757lm	4000K	> 72 000h		DIM			
559GR						-			
1733AL		22,2W	1162lm	4000K	> 72 000h	DALI2/ NightDim			
1733GR						-			
1737AL						-			
1737GR						-			
1851AL		-							
1851GR		-							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control			
1736AL	LED	22,2W	1416lm	3000K	> 72 000h	DALI2/ NightDim			
1736GR						-			
1852GR						13,6W	853lm	3000K	-
1852GR									-
553AL		959lm	4000K	> 72 000h		DIM			
553GR						-			
1734AL		22,2W	1475lm	4000K	> 72 000h	DALI2/ NightDim			
1734GR						-			
1738AL						-			
1738GR						-			
1853AL		-							
1853GR		-							

# Namosos

Lighting should give us a feeling of safety and comfort when moving around. Namosos will be perfect for lighting stairs, steps, staircases and passageways. We recommend Namosos where you need to illuminate the most important points of your property, especially if there is a difference in level. This unusual luminaire will work perfectly as a modern lighting solution for wall surfaces and guarantees even illumination of the area under the lamp. It looks equally good built into the wall as well as the bollard version.






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1341AL	LED	4W	123lm	3000K	> 50 000	Dimmable
1341GR						
5156AL		4,2W	162lm	4000K		
5156GR						





# Namsos

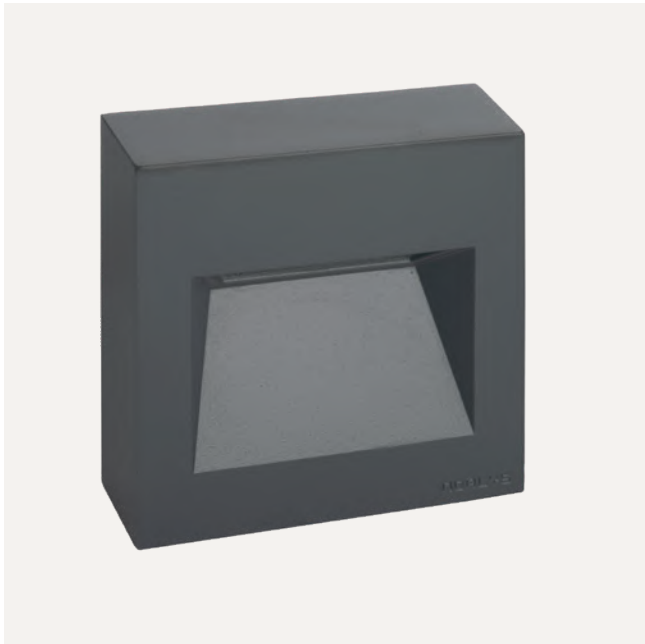

**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**

**Art. 157**

Mounting distance





# Namsos



**Colour:**



Aluminium



Graphite


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 112**

Concreting anchor




**Art. 113**

Ground anchor



**Art. 114**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1931AL	LED	8,4W	566lm	3000K	> 102 000h	Dimmable
1931GR			612lm			
5012AL		8,6W	877lm	4000K		DALI2
5012GR						
6035AL		13,8W	843lm	3000K		Dimmable
6035GR						
6033AL		13,6W	843lm	3000K		Dimmable
6033GR						
1921AL		14W	907lm	4000K		Dimmable
1921GR						
1922AL		14W	907lm	4000K		Dimmable
1922GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1932AL	LED	8,6W	566lm	3000K	> 102 000h	Dimmable
1932GR			612lm			
5013AL		8,6W	877lm	4000K		DALI2
5013GR						
6036AL		13,8W	843lm	3000K		Dimmable
6036GR						
6034AL		13,6W	843lm	3000K		Dimmable
6034GR						
1923AL		14W	907lm	4000K		Dimmable
1923GR						
1924AL		14W	907lm	4000K		Dimmable
1924GR						









# Namsos




**Colour:**

-  Aluminium
-  Graphite
-  Galvanized

**Colour temperature:**



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
1929AL	LED	13,6W	843lm	3000K	> 102 000h	Dimmable		
1929GR								
1930AL								
1930GR								
6032AL		13,8W	904lm				4000K	DALI2
6032GR								
1934AL		14W	907lm	4000K		Dimmable		
1934GR								
5011AL		8,6W	612lm	4000K		DALI2		
5011GR								
6031AL		13,8W	877lm	4000K		DALI2		
6031GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1933GA	LED	5,2W	295lm	3000K	> 70 000	Dimmable
5116GA			689lm	4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1340AL	LED	4W	47lm	3000K	> 50 000h	Dimmable
1340GR						



# Namsos Mini



**Colour:**



Aluminium



Graphite


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).





# Nice



**Colour:**


- Aluminium
- Graphite

**Colour**

2700K 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 154**

Wall mounting arm



**Art. 7665**

Reduction for fittings Ø60 for mounting on a pole Ø76





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
777AL	LED	38W	3029lm	3000K	> 110 000h	-
777GR						
5089GR		36.3W	2964lm	4000K	> 50 000h	DALI2/ NightDim
5089AL						
5088AL						
5088GR		38W	3092lm	4000K	> 110 000h	-
5001AL						
5001GR						




# Oppland

The Oppland bollards will work fantastically between a garden path and a flower bed. They will illuminate a passage, add mystery to the plants and give depth to the garden.

The Oppland luminaires family stands for energy-saving LED technology, minimalist yet elegant design, durability of materials and reliability. Choice between a modern-style aluminium body or a wooden body, in two colours, in arrangements closer to nature. Oppland bollards will not only provide exceptionally effective lighting. They will bring an elegant and modern accent to any environment that is sure to attract attention. Oppland simply illuminates beautifully.



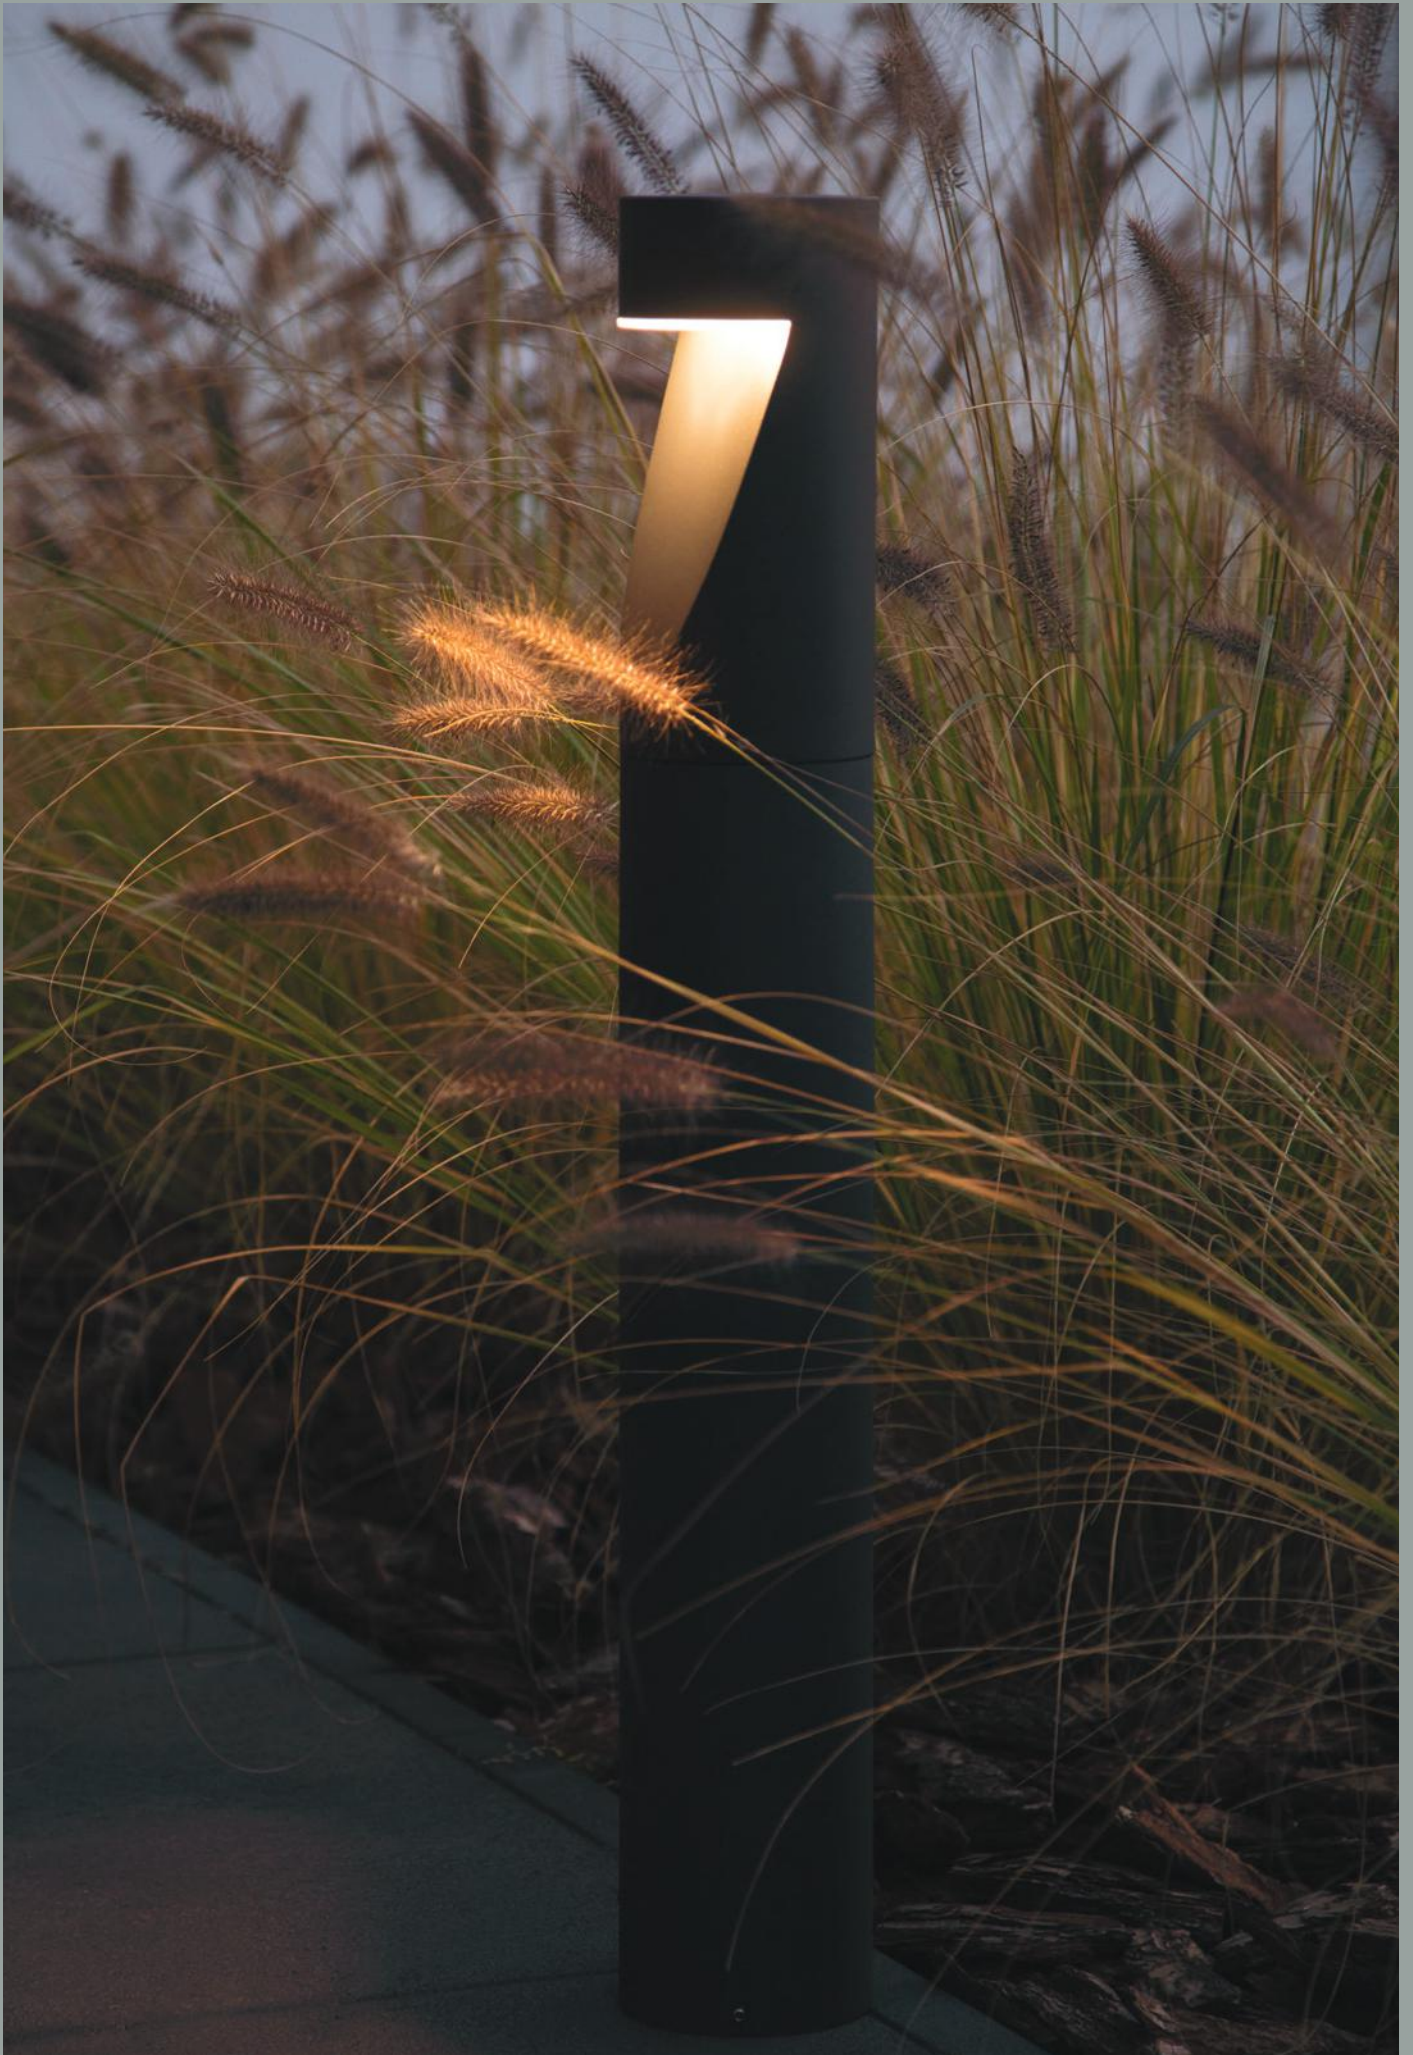

# Oppland



**Colour:**



Aluminium



Graphite


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 205**

Concreting anchor




**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1324AL	LED	8,2W	304lm	3000K	> 171 460h	DALI2
1324GR						
1321AL		9,3W	301lm	4000K	> 50 000h	Dimmable
1321GR						
5123AL						
5123GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2360AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2360GR						
2361AL		10,1W	312lm	4000K		
2361GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
2364AL	LED	10W	301lm	3000K	> 50 000h	Dimmable
2364GR						
2365AL		10,1W	312lm	4000K		
2365GR						



# Oppland

scandinavian wood

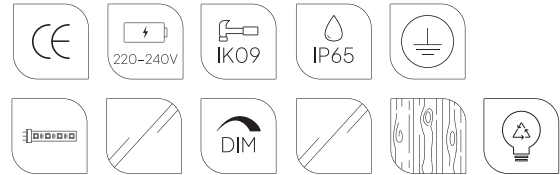

**Colour:**

- Aluminium
- Graphite

**Colour temperature:**


2700K                      4000K



Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 205**

Concreting anchor



**Art. 206**

Anchoring support





# Rena





**Colour:**

● Stainless Steel

**Colour temperature:**


2700K 4000K

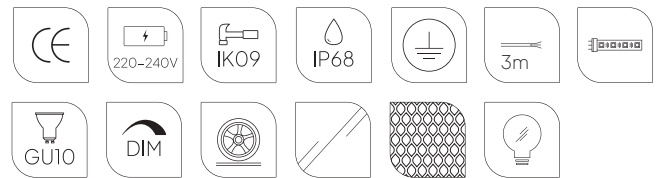


Multiple light variants.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Wide range of light direction adjustment.

**Accessories:**


**Art. 142**

Ground assembly module




**Art. 143**

Power cord cover




**Art. 145**

Hermetic 3-track box



**Art. 146**

Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1551ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1553ST		-	-	-		
1762ST	LED	4W	318lm	3000K	50 000h	Dimmable
1763ST			369lm	4000K		
1766ST		8W	672lm	3000K		
1767ST			731lm	4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1641ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1643ST		-	-	-		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1555ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1557ST		-	-	-		
1752ST	LED	4W	178lm	3000K	50 000h	Dimmable
1753ST			180lm	4000K		
1756ST		8,8W	314lm	3000K		
1757ST			330lm	4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1645ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1647ST		-	-	-		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1550ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1552ST		-	-	-		
1760ST	LED	4W	318lm	3000K	50 000h	Dimmable
1761ST			369lm	4000K		
1764ST		8W	672lm	3000K		
1765ST			731lm	4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1640ST	LED GU10	5,5W	367lm	3000K	40 000	Dimmable
1642ST		-	-	-		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1554ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1556ST		-	-	-		
1750ST	LED	4,2W	178lm	3000K	> 50 000h	Dimmable
1751ST		4W	180lm	4000K		
1754ST		8W	314lm	3000K		
1755ST			330lm	4000K		



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1644ST	LED GU10	5,5W	237lm	3000K	40 000	Dimmable
1646ST		-	-	-		



# Rena Cover




**Colour:**

- Black
- Graphite

**Colour temperature:**


2700K 4000K




Multiple light variants.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Wide range of light direction adjustment.

**Accessories:**


**Art. 142**  
Power cord cover



**Art. 143**  
Hermetic 3-track box



**Art. 145**  
Hermetic 3-track box





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1632BL	LED GU10	-	-	-	-	-
1632GR		-	-	-	-	-
1633BL		5,5W	13lm	3000K	40 000	Dimmable
1633GR						
1770BL	LED	4W	24lm	3000K	50 000h	Dimmable
1770GR			25lm	4000K		
1771BL						
1771GR						
1774BL		8,7W	48lm	3000K		
1774GR						
1775BL		8W	48lm	4000K		
1775GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1630BL	LED GU10	-	-	-	-	-
1630GR		-	-	-	-	-
1631BL		5,5W	13lm	3000K	40 000	Dimmable
1631GR						
1768BL	LED	4W	24lm	3000K	50 000h	Dimmable
1768GR			28lm	4000K		
1769BL						
1769GR						
1772BL		8W	48lm	3000K		
1772GR						
1773BL		56lm	4000K			
1773GR						





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1650BL	LED GU10	-	-	-	-	-
1650GR		-	-	-	-	-
1651BL		5,5W	13lm	3000K	40 000	Dimmable
1651GR		5,5W	13lm	3000K	40 000	Dimmable



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1652BL	LED GU10	-	-	-	-	-
1652GR		-	-	-	-	-
1653BL		5,5W	13lm	3000K	40 000	Dimmable
1653GR		5,5W	13lm	3000K	40 000	Dimmable



# Rondane



**Colour:**


- Aluminium
- Graphite

**Colour temperature:**

2700K                      4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
538AL	E27	-	-	-	-	-
538GR		-	-	-	-	-
537AL	LED	8,5W	305lm	3000K	> 110 000h	Dimmable
537GR						-
539AL		17,5W	732lm		50 000h	-
539GR						-
548AL	9,5W	345lm			Motion Detector	
548GR						

\*All indexes also available in 4000K and 2700K versions.



# Sandvik



**Colour:**


- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K                      4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 148**

Corner bracket





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1730AL	LED GU10	-	-	-	-	-
1730BL		-	-	-	-	-
1730GR		-	-	-	-	-
1730WH		-	-	-	-	-
1731AL	LED GU10	7,8W	420lm	2700K	40 000h	Dimmable
1731BL						
1731GR						
1731WH						
1732AL						
1732BL						
1732GR						
1732WH						
5152AL	LED	16W	1126lm	3000K	> 50 000	Dimmable
5152BL						
5152GR						
5152WH						
5152WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1740AL	LED GU10	-	-	-	-	-
1740BL		-	-	-	-	-
1740GR		-	-	-	-	-
1740WH		-	-	-	-	-
1741AL	LED GU10	3,9W	210lm	2700K	40 000h	Dimmable
1741BL						
1741GR						
1741WH						
1742AL						
1742BL						
1742GR						
1742WH						
5153AL	LED	8W	563lm	3000K	> 50 000h	Dimmable
5153BL						
5153GR						
5153WH						
5153WH						

# Sandvik



**Colour:**


- Aluminium
- Graphite
- Black
- White

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
795AL	LED GU10	3,9W	210lm	2700K	40 000h	Dimmable
79BL						
795GR						
795WH						
796AL						
796BL						
796GR						
796WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
2937AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III
2937BL							
2937GR							
2935AL							
2935BL							
2935GR							
2939AL			604lm	3000K			IESNA Type V
2939BL							
2939GR							
2941AL							
2941BL							
2941GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
2945AL	LED	7,7W	730lm	4000K	>268 210h	Dimmable	IESNA Type II/III
2945BL							
2945GR							
2943AL							
2943BL							
2943GR							
2947AL			604lm	3000K			IESNA Type V
2947BL							
2947GR							
2949AL							
2949BL							
2949GR							




# Skara

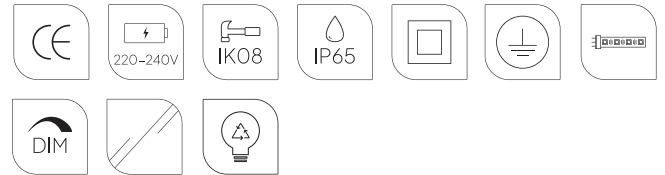

**Colour:**

- Aluminium
- Black
- Graphite


**Colour temperature:**



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



# Sande





**Colour:**


- Graphite
- Black

**Colour temperature:**


2700K 4000K

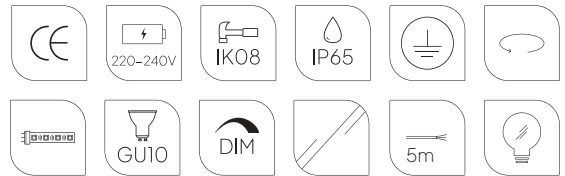

Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Wide range of light direction adjustment.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1592BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable
1592GR						
1593BL	LED	8,6W	566lm		> 145 000h	
1593GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1598BL	LED GU10	5,5W	276lm	3000K	40 000	Dimmable
1598GR						
1594BL	LED	8,6W	738lm		> 145 000h	
1594GR						

# Sol



**Colour:**

- Aluminium
- Graphite
- Black
- White


**Colour temperature:**



Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





Product Eco-friendly.

**Accessories:**


**Art. 3095**

Distance





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4051AL	LED	19,1W	2101lm	3000K	> 100 000h	Dimmable
4051BL						
4051GR						
4051WH						
4052AL						
4052BL			2421lm	4000K		
4052GR						
4052WH						
4055AL			DALI2			
4055BL				2101lm		3000K
4055GR						
4055WH						
4056AL				2421lm		4000K
4056BL						
4056GR						
4056WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4053AL	LED	19,3W	1655lm	3000K	> 100 000h	Dimmable
4053BL						
4053GR						
4053WH						
4054AL			1905lm	4000K		
4054BL						
4054GR						
4054WH						
4057AL			DALI2			
4057BL				1663lm		3000K
4057GR						
4057WH						
4058AL				1912lm		4000K
4058BL						
4058GR						
4058WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
4043AL	LED	19,3W	1938lm	3000K	> 100 000h	Dimmable
4043BL						
4043GR						
4043WH						
4044AL						
4044BL						
4044GR		2221lm	4000K			
4044WH						
4047AL		19,1W	1924lm	3000K	> 100 000h	DALI2
4047BL						
4047GR						
4047WH						
4048AL						
4048BL						
4048GR		2227lm	4000K			
4048WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control		
4045AL	LED	19,3W	1633lm	3000K	> 100 000h	Dimmable		
4045BL								
4045GR								
4045WH								
4046AL		19,1W	1890lm	4000K			> 100 000h	DALI2
4046BL								
4046GR								
4046WH								
4049AL		19,3W	1618lm	3000K	> 100 000h	DALI2		
4049BL								
4049GR								
4049WH								
4050AL		19,1W	1866lm	4000K			> 100 000h	DALI2
4050BL								
4050GR								
4050WH								

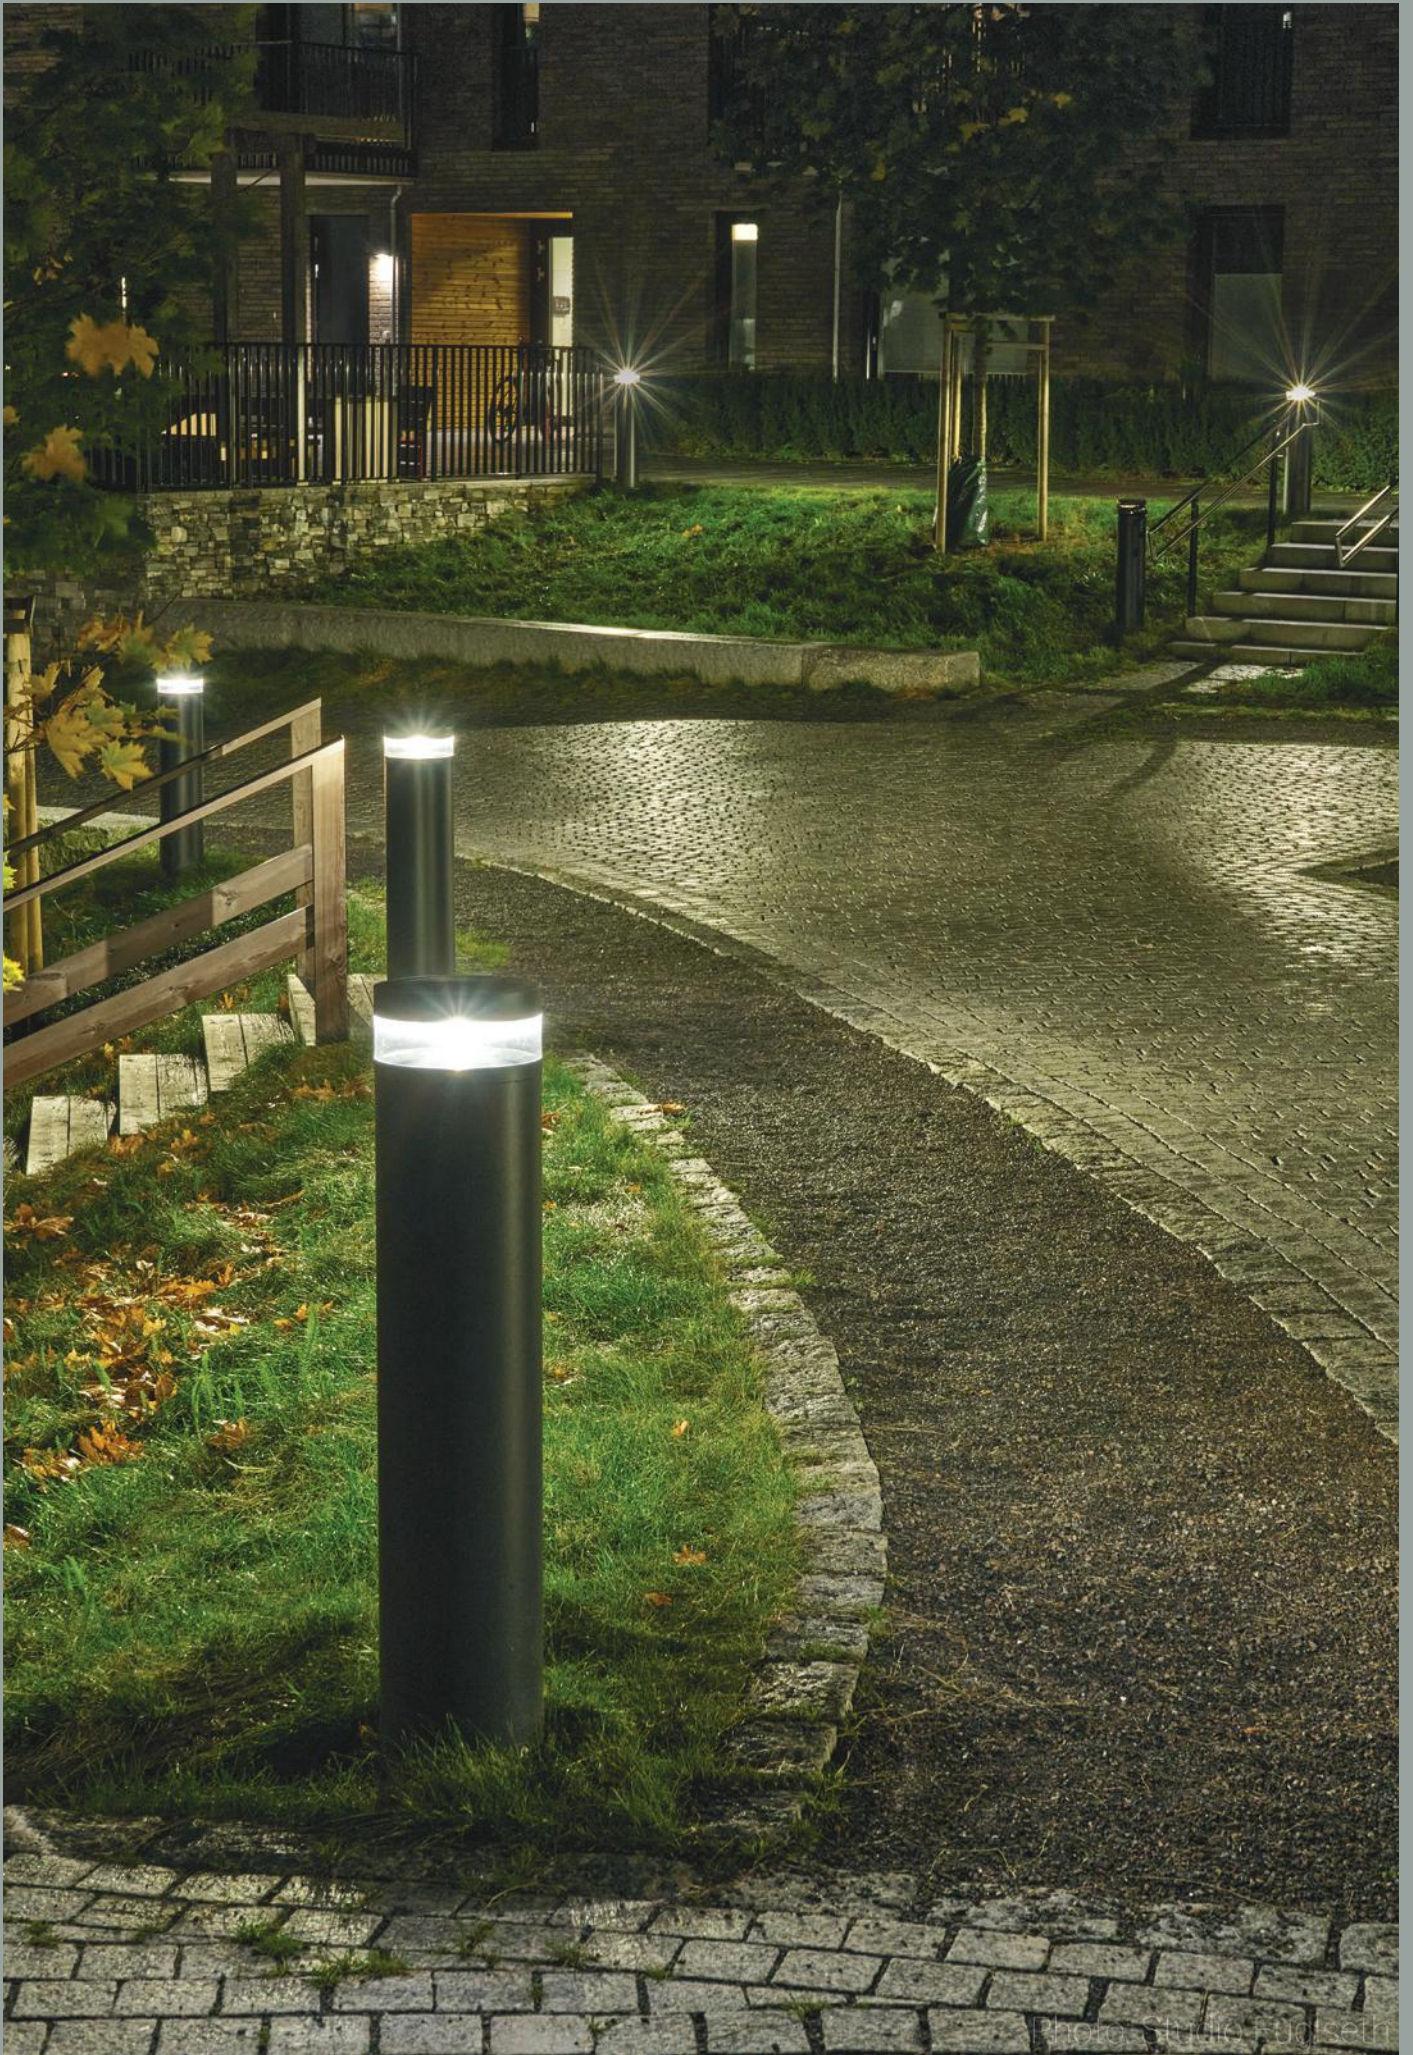



# Stavanger



**Colour:**



Aluminium



Graphite


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions – control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1230**

Concreting anchor




**Art. 1231**


Ground anchor




**Art. 1232**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1240AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable	
1240GR							
5008AL			493lm	4000k	50 000h		DALI2/ NightDim
5008GR							
5060AL			428lm	3000K	> 145 000h		
5060GR							
5063AL							
5063GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1243AL	E27	-	-	-	-	-	I
1243GR							
2240AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2240GR							
2241AL			565lm	4000K			
2241GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1244AL	LED	12,2W	428lm	3000K	> 145 000h	Dimmable	
1244GR							
5009AL		11,9W	530lm	4000k	50 000h		DALI2/ NightDim
5009GR							
5061AL		12,2W	493lm	3000K	> 145 000h		
5061GR							
5064AL							
5064GR							




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1246AL	E27	-	-	-	-	-	I
1246GR							
2244AL	LED	13,6W	483lm	3000K	> 72 000h	Dimmable	II
2244GR							
2245AL			565lm	4000K			
2245GR							

**Bollard**

**Modern**



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1247AL	LED	8,4W	312lm	3000K	> 145 000h	Dimmable
1247GR						
5010AL						
5010GR						
5062AL		8,5W	351lm	4000k	50 000h	DALI
5062GR						
5065AL						
5065GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Class
1248AL	E27	-	-	-	-	-	I
1248GR							
2248AL	LED	8,9W	337lm	3000K	> 72 000h	Dimmable	II
2248GR			403lm	4000K			
2249AL							
2249GR							





# Voss

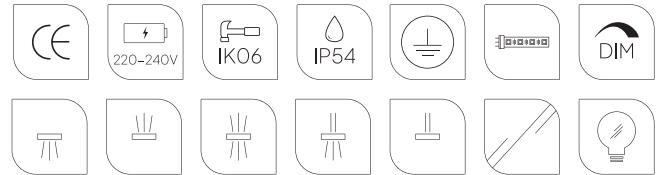

**Colour:**



Aluminium



Graphite


**Colour temperature:**

2700K


4000K





Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Multiple light variants.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1951AL	LED	10,8W	557lm	3000K	> 171 460	Dimmable
1951GR						
5034AL		16,8W	610lm	4000K	50 000	
5034GR						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1955AL	LED	10,5W	557lm	3000K	> 102 000h	Dimmable
1955GR						
5036AL		10,5W	557lm	4000K	50 000	
5036GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1950AL	LED	15,4W	614lm	3000K	50 000h	-
1950GR						
1950WH						
5032AL		16,9W	655lm	4000K	> 102 000h	
5032GR						
5032WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1952AL	LED	21W	1115lm	3000K	> 102 000h	-
1952GR						
1952WH						
5033AL			1077lm	4000K		
5033GR						
5033WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1953AL	LED	6.4W	55,7lm	3000K	> 102.000h	-
1953GR						
1953WH						
5128AL			55lm	4000K		Dimmable
5128GR						
5128WH						








# Vasa




**Colour:**

- Aluminium
- Graphite
- Black
- White


**Colour temperature:**



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Multiple light variants.



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
120AL	E27	-	-	-	-	-
120BL						
120GR						
120WH						
127AL	LEDE27	8W	384lm	2700K	25 000h	
127BL						
127GR						
127WH						
128AL	LED	8,5W	631lm	3000K	> 72 000h	Dimmable
128BL						
128GR						
128WH						
5019AL	LED	8,3W	668lm	4000K		
5019BL						
5019GR						
5019WH						
5093AL	LED	9,7W	670lm	3000K	> 70 000h	DALI2
5093BL						
5093GR						
5093WH						
5092AL	LED	14,1W	1039lm	4000K		
5092BL						
5092GR						
5092WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
450AL	LED	6W	440lm	3000K	> 102 000h	Dimmable
450BL						
450GR						
450WH						
451AL	LED	6W	457lm	4000K	> 102 000h	Dimmable
451BL						
451GR						
451WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
454AL	LED	6W	440lm	3000K	> 102 000h	Dimmable
454BL						
454GR						
454WH						
455AL	LED	6W	457lm	4000K	> 102 000h	Dimmable
455BL						
455GR						
455WH						

# Visby

The city needs light of the right quality and in the right quantity. It needs balance.

The Visby model can be an excellent choice here.

Visby is a modernist pole lamp, economical thanks to the LED modules, but also with an excellent ratio of energy consumption to lighting capacity. It is ideal for illuminating streets, built-up areas, parks and squares, where it creates practical yet beautiful lighting. This is complemented by an innovative ring bracket system at the height of the light source and a plane reflection system, which optimally reduces glare and creates a harmonious light beam.







# Visby



**Colour:**

-  Aluminium
-  Graphite


**Colour temperature:**



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 7660**

Reduction for Ø60 luminaires for mounting on the Ø76 pole.



**Art. 7662**

EK480 pole connector with 6A fuse.





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
577AL	LED	27W	1388lm	3000K	50 000h
577GR					
576AL		44,5W	2465lm	3000K	
576GR					
5003AL		26,5W	1553lm	4000K	
5003GR					
5002AL		43,6W	2624lm	4000K	
5002GR					




# Glode




**Colour:**

- Aluminium
- Graphite
- Black

**Colour temperature:**



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 112**

Concreting anchor




**Art. 113**

Anchoring support



**Art. 114**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1262AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1262BL							
1262GR							
1261AL							
1261BL							
1261GR							
1281AL		54W	7320lm	3000K		-	
1281BL							
1281GR							
1282AL							
1282BL							
1282GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1264AL	LED	53W	7746lm	4000K	> 70 000h	DALI2	IESNA type IV
1264BL							
1264GR							
1263AL							
1263BL							
1263GR							
1283AL		54W	7320lm	3000K		-	
1283BL							
1283GR							
1284AL							
1284BL							
1284GR							



# Trysil

Thoroughly futuristic, ahead of its time but elegant. Whatever your needs, Trysil is the perfect choice for those who wish to combine modernity with reliability and exceptional style. Trysil is available in bollard and pole versions. It offers a range of state-of-the-art light sources and controls, adapted to the needs of the most demanding users.

Trysil family means quality, design and functionality.





# Trysil



**Colour:**


- Aluminium
- Graphite
- Black

**Colour**

2700K                      4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).

**Accessories:**


**Art. 1907**

Concreting anchor




**Art. 1908**

Anchoring support






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1097AL	LED	7,3W	647lm	4000K	> 171 460h	Dimmable
1097BL						
1097GR						
1096AL			620lm	3000K	> 102 000h	
1096BL						
1096GR						
1108AL		9,5W	660lm	3000K	50 000h	-
1108BL						
1108GR						
1109AL			700lm	4000K		
1109BL						
1109GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1101AL	LED	7,4W	694lm	4000K	> 109 000h	Dimmable	IESNA type V
1101BL							
1101GR							
1100AL			703lm	3000K			
1100BL							
1100GR							
1102AL		8W	689lm	3000K	> 109 000h	DALI2	
1102BL							
1102GR							
1103AL			674lm	4000K			
1103BL							
1103GR							
1105AL	LED	7,4W	706lm	3000K	> 109 000h	Dimmable	IESNA type II/III
1105BL							
1105GR							
1104AL			738lm	3000K			
1104BL							
1104GR							
1106AL		8W	707lm	3000K	> 109 000h	DALI2	
1106BL							
1106GR							
1107AL			693lm	4000K			
1107BL							
1107GR							





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1048AL	LED	12,5W	1260lm	3000K	> 72 000h	Dimmable
1048BL						
1048GR						
1049AL						
1049BL						
1049GR						
1050AL		20W	1973lm	3000K	>102 000h	DALI2/ NightDim
1050BL						
1050GR						
1051AL						
1051BL						
1051GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1055AL	LED	8,7W	1141lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1055BL							
1055GR							
1054AL		8,4W	1081lm	3000K			
1054BL							
1054GR							
1058AL		8,6W	1111lm	3000K			
1058BL							
1058GR							
1059AL		8,7W	1161lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type II/III
1059BL							
1059GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1001AL	LED	25W	2476lm	4000K	> 102 000h	Dimmable
1001BL						
1001GR						
1000AL						
1000BL						
1000GR						
1002AL		40W	3901lm	3000K	> 102 000h	DALI2
1002BL						
1002GR						
1003AL						
1003BL						
1003GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens							
1007AL	LED	16,3W	2377lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V							
1007BL														
1007GR														
1006AL														
1006BL														
1006GR														
1010AL			2282lm	3000K			2216lm	3000K	> 100 000h	DALI2/ NightDim	IESNA type II/III			
1010BL														
1010GR														
1011AL														
1011BL			2293lm	4000K			2293lm	4000K				> 100 000h	DALI2/ NightDim	IESNA type II/III
1011GR														



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control				
1060AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable				
1060BL										
1060GR										
1061AL			1719lm	4000K			20W	1973lm	3000k	DALI2/ NightDim
1061BL										
1061GR										
1062AL		2054lm	4000K	20W		2054lm		4000K	DALI2/ NightDim	
1062BL										
1062GR										
1063AL		2054lm	4000K			20W	2054lm	4000K		DALI2/ NightDim
1063BL										
1063GR										




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control				
1012AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable				
1012BL										
1012GR										
1013AL							33W	3448lm	4000K	DALI2/ NightDim
1013BL										
1013GR										
1014AL		3901lm	3000K	40W		3901lm	3000K	DALI2/ NightDim		
1014BL										
1014GR										
1015AL		4145lm	4000K			40W	4145lm		4000K	DALI2/ NightDim
1015BL										
1015GR										



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1067AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1067BL							
1067GR							
1066AL							
1066BL							
1066GR							
1070AL			1594lm	3000K			IESNA type II/III
1070BL							
1070GR							
1059AL							
1059BL							
1059GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens
1019AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V
1019BL							
1019GR							
1018AL							
1018BL							
1018GR							
1022AL			3194lm	3000K			IESNA type II/III
1022BL							
1022GR							
1023AL							
1023BL							
1023GR							

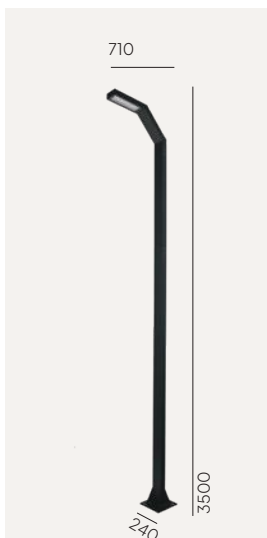

Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1072AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable
1072BL						
1072GR						
1073AL			1719lm	4000K		
1073BL						
1073GR						






Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control
1024AL	LED	34W	3347lm	3000K	> 102 000h	Dimmable
1024BL						
1024GR						
1025AL						
1025BL						
1025GR						
1026AL		40W	3901lm	3000K		DALI2/ NightDim
1026BL						
1026GR						
1027AL						
1027BL						
1027GR						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1079AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1079BL								
1079GR								
1078AL								
1078BL			1638lm	3000K				IESNA type II/III
1078GR								
1082AL								
1082BL								
1082GR			1594lm	4000K				
1083AL								
1083BL								
1083GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1031AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1031BL								
1031GR								
1030AL								
1030BL			3277lm	3000K				IESNA type II/III
1030GR								
1034AL								
1034BL								
1034GR			3194lm	4000K				
1035AL								
1035BL								
1035GR								



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1084AL	LED	17W	1667lm	3000K	> 102 000h	Dimmable	
1084BL				3000K			
1084GR			3000K				
1085AL			3000K				
1085BL		1719lm	4000K	DALI2/ NightDim			
1085GR			4000K				
1086AL		20W	1973lm	3000K		> 102 000h	DALI2/ NightDim
1086BL				3000K			
1086GR				3000K			
1087AL				4000K			
1087BL	4000K						
1087GR	4000K						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens	
1091AL	LED	12,2W	1705lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V	
1091BL				4000K				
1091GR			4000K					
1090AL			1638lm	3000K				IESNA type II/III
1090BL								
1090GR			3000K					
1094AL			1594lm	3000K			IESNA type II/III	
1094BL								3000K
1094GR								3000K
1095AL			1667lm	4000K			IESNA type II/III	
1095BL	4000K							
1095GR	4000K							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	
1037AL	LED	34W	3448lm	4000K	> 102 000h	Dimmable	
1037BL							
1037GR							
1036AL			3347lm				
1036BL							
1036GR							
1038AL		40W	3901lm	3000K		> 102 000h	DALI2
1038BL							
1038GR							
1039AL			4145lm	4000K			
1039BL							
1039GR							



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light control	Lens			
1043AL	LED	23,3W	3425lm	4000K	> 100 000h	DALI2/ NightDim	IESNA type V			
1043BL										
1043GR										
1042AL			3277lm	3000K				> 100 000h	DALI2/ NightDim	IESNA type II/III
1042BL										
1042GR										
1046AL			3194lm	3000K						
1046BL										
1046GR										
1047AL			3308lm	4000K						
1047BL										
1047GR										



# Bergen



**Colour:**


 Black

 Galvanized


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 153**

Corner bracket



**Art. 159**

Spacer






Art	Type of light source
270BL	E27
270GA	



Art	Type of light source
271BL	E27
271GA	

# Bergen

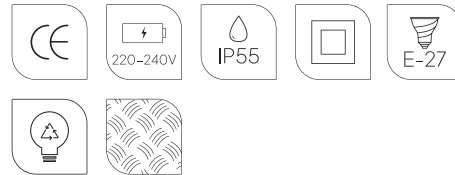

**Colour:**

Black

Galvanized


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
611BL	E27	-	-	-	-	-
611WH		-	-	-	-	-
615BL	LEDE27	LED max 9W	240lm	2700K	25 000h	Dimmable
615WH						
617BL	LED	8W	185lm	3000K	50 000h	
617WH						
618BL		10W	-		-	-
618WH						





# Berlin



**Colour:**

Black

White


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Product Eco-friendly.



Art	Type of light source
610BL	E27
610WH	




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
631BL	E27	-	-	-	-	-
631GA		-	-	-	-	-
637BL	LED	8W	364lm	3000K	50 000h	Dimmable
637GA						
638BL		10W	532lm			
638GA						



Art	Type of light source
630BL	E27
630GA	

# Bremen



**Colour:**

Black

Galvanized

**Colour temperature:**

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



# Lofoten



**Colour:**

● Black

**Colour temperature:**

2700K      4000K



Art      Type of light source  
1940BL | E27




Luminaire suitable for extreme conditions.



Product Eco-friendly.




Art      Type of light source  
1960BL | E27



Double corrosion protection (galvanising+powder coating).



# Lofoten

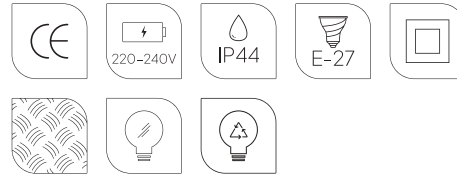

**Colour:**

● Black

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**

**Art. 155**

Corner bracket





Art	Type of light source
1939BL	E27



Art	Type of light source
1949BL	E27



Art	Type of light source
1963BL	E27



Art	Type of light source
1969BL	E27





# Lofoten



Colour:  
● Black

Colour temperature:  
2700K 4000K



Art	Type of light source
1944BL	E27



Art	Type of light source
1945BL	E27

# Lofoten



Colour temperature:

2700K

4000K



Colour:


● Black



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
1942BL	E27



Art	Type of light source
1962BL	E27



# Lofoten



Colour:

● Black

Colour temperature:

2700K 4000K



Luminaire suitable for extreme conditions.




Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
1941BL	E27



Art	Type of light source
1961BL	E27



# Lofoten



Colour:

● Black

Colour temperature:

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
1946BL	E27



Art	Type of light source
1966BL	E27



Art	Type of light source
1948BL	LED E27



Art	Type of light source
1947BL	E27



Art	Type of light source
1968BL	LED E27



# Lofoten



Colour:

● Black

Colour temperature:

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

## Accessories:


### Art. 405

Concreting anchor



### Art. 406

Ground anchor





Art	Type of light source
690BL	E27
690GA	

# Larvik



**Colour:**



Black



Galvanized

**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 153**

Mounting corner




**Art. 159**

Luminaire mounting distance





# Oslo

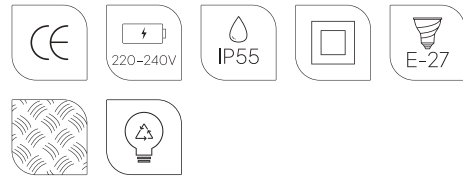

**Colour:**

● Black

● Galvanized

**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).




Art	Type of light source
240BL	E27
240GA	

**Accessories:**


**Art. 153**

Mounting corner




**Art. 159**

Luminaire mounting distance





# Oslo

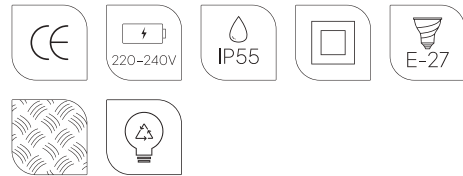

**Colour:**

Black

Galvanized

**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
245 BL	E27
245 GA	






# Oslo



**Colour:**

- Black
- Galvanized

**Colour temperature:**



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 405**


Concreting anchor.



**Art. 406**


Ground anchor.



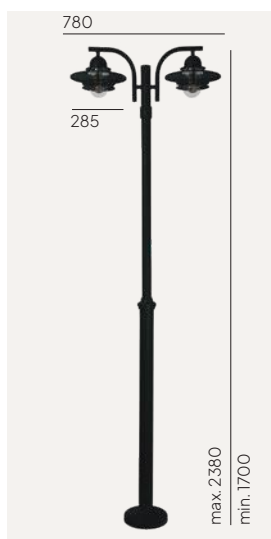

Art	Type of light source
242BL	E27
242GA	

# Oslo

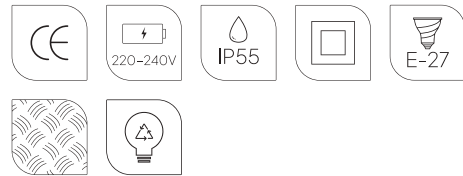

**Colour:**

 Black

 Galvanized

**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
240A/BL	E27
240A/GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
220BL	E27	-	-	-	-	-
220GA		-	-	-	-	-
1600BL	LED	8W	240lm	3000K	50 000h	Dimmable
1600GA						
5110BL		8W	250lm	4000K		
5110GA						

# Stockholm



**Colour:**

● Black

● Galvanized

**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
226BL	E27
226GA	E27



# Stockholm & Stockholm Big




**Colour:**

- Black
- Galvanized

**Colour temperature:**

2700K 4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 153**

Corner bracket




**Art. 159**

Spacer





Art	Type of light source
286BL	E27
286GA	



Art	Type of light source
280BL	E27
280GA	







# Stockholm



**Colour:**




**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 205**

Concreting anchor.



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
288BL	E27	-	-	-	-	-
288GA						
1464BL	LEDE27	8W	100lm	2700K	25 000h	Dimmable
1464GA						
1265BL	LED	8,5W	342lm	3000K	50 000h	
1265GA			432lm			
1604BL			10,5W	453lm		4000K
1604GA						
1605BL						
1605GA						



Art	Type of light source
297BL	E27
297GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
289BL	E27	-	-	-	-	-
289GA						
1469BL	LEDE27	8W	100lm	2700K	25 000h	Dimmable
1469GA						
1260BL	LED	8,5W	342lm	3000K	> 50 000h	
1260GA			362lm			
1606BL			10,5W	453lm		4000K
1606GA						
1603BL						
1603GA						
1602BL			432lm	3000K		
1602GA						



Art	Type of light source
298BL	E27
298GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control	Class
299BL	E27	LED max 9W	-	-	-	-	II
299GA							
1269BL	LEDE27	8W	100lm	2700K	25 000h	Dimmable	
1269GA							
1268BL	LED	10W	333lm	3000K	50 000h	I	
1268GA							





# Stockholm

scandinavian wood



Colour:

- Black
- Galvanized

Colour temperature:


2700K      4000K



Luminaire housing made of natural wood.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).

Accessories:


**Art. 205**

Concreting anchor.



**Art. 206**

Anchoring support





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1423BL	E27	-	-	-	-	-
1423GA						
1426BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1426GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1433BL	E27	-	-	-	-	-
1433GA						
1436BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1436GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1420BL	E27	-	-	-	-	-
1420GA						
1429BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1429GA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1430BL	E27	-	-	-	-	-
1430GA						
1439BL	LED	8,5W	342lm	3000K	50 000h	Dimmable
1439GA						







# Stockholm & Stockholm Big



Colour:

● Black

● Galvanized

Colour temperature:

2700K

4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.



Double corrosion protection (galvanising+powder coating).



Art	Type of light source
285BL	E27
285GA	



Art	Type of light source
287BL	E27
287GA	




Art	Type of light source
284BL	E27
284GA	





# Stockholm



**Colour:**

- Black
- Galvanized

**Colour temperature:**

2700K                      4000K



Luminaire suitable for extreme conditions.



Product Eco-friendly.




Double corrosion protection (galvanising+powder coating).

**Accessories:**


**Art. 405**

Concreting anchor.



**Art. 406**

Ground anchor.





Art	Type of light source
281BL	E27
281GA	




Art	Type of light source
283BL	E27
283GA	







# Arvika



Colour:



Black




Galvanized

Colour

2700K


4000K



Luminaires with energy distributor option.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Double corrosion protection (galvanising+powder coating).


Accessories:

Art. 208

Concreting anchor.



Art. 207





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
898BL	E27	-	-	-	-
898GA					
891BL	LED	8,8W	543lm	3000K	> 102 000h
891GA					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Energy distributor ~230V
899BL	E27	-	-	-	-	F (SHUKO)
899GA						
893BL	LED	8,8W	543lm	3000K	> 102 000h	
893GA						
901BL		12,7W	568lm	4000K	> 72 000h	E (UNI)
901GA						
902BL						
902GA						





# Basel



Colour:

-  Black
-  Galvanized
-  Aluminium
-  Stainless Steel


Colour



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
660AL	E27
660BL	
660GA	
660ST	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
661AL	E27	-	-	-	-	-
661BL						
661GA						
661ST						
MD661AL	E27	-	-	-	-	Motion Detector
MD661BL						
MD661GA						
MD661ST						
668AL	LED	5,2W	483lm	3000K	> 70 000	Dimmable
668BL						
668GA						
668ST						
671AL	LED	9,5W	-	4000K	50 000h	Motion Detector
671BL						
671GA						
671ST						
672AL	LED	9,5W	-	4000K	50 000h	Motion Detector
672BL						
672GA						
672ST						







# Bern



**Colour:**

- Black
- Galvanized
- Aluminium
- Stainless Steel

**Colour**


2700K 4000K



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
650AL	E27
650BL	
650GA	
650ST	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
651AL	E27	-	-	-	-	-
651BL						
651GA						
651ST						
655AL	LED	5,2W	477lm	3000K	> 72 000	Dimmable
655BL						
655GA						
655ST						
675AL	LED	11,2W	819lm	4000K	50 000h	Motion Detector
675BL						
675GA						
675ST						
676AL						
676BL						
676GA						
676ST						





# Boden



Colour:

● Black

● Galvanized

Colour

2700K


4000K



Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
862BL	E27
862GA	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
860BL	E27	-	-	-	-	-
860GA						
866BL	LED	8W	307lm	3000K	50000h	Dimmable
866GA				4000K		
5109BL			-			
5109GA						







# Karlstad




**Colour:**

- Black
- Copper
- Galvanized
- White

**Colour**



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 153**

Mounting corner



**Art. 159**

Luminaire mounting distance





Art	Type of light source
230BL	E27
230CO	
230GA	
230WH	



Art	Type of light source
230A/BL	E27
230A/GA	
230A/WH	

# Karlstad



**Colour:**

- Black
- White

- Galvanized

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
2033BL	E27
2033GA	



Art	Type of light source
2032BL	E27
2032GA	

# Karlstad



**Colour:**

- Black
- Galvanized

**Colour temperature:**


2700K      4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 405**

Concreting anchor.



**Art. 406**

Ground anchor.







# Lund



**Colour:**

Black

Galvanized

**Colour temperature:**

2700K


4000K




Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.




Art	Type of light source
290BL	E27
290GA	

**Accessories:**

**Art. 153**  
Mounting corner




**Art. 159**  
Luminaire mounting distance





# Lund

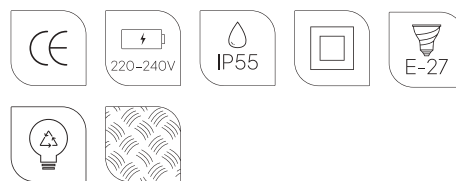

**Colour:**

- Black
- Galvanized


**Colour temperature:**



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 405**

Concreting anchor.



**Art. 406**

Ground anchor.





Art	Type of light source
274BL	E27
274GA	



Art	Type of light source
275BL	E27
275GA	

# Mandal

An intriguing as well as functional and durable wall fixture. Scandinavian style is not only about design, but also about usability. Materials used to construct Mandal are robust and easy to maintain. Harmonious beam of light through the glass panes. It is a truly versatile luminaire that meets lighting requirements of contemporary architecture. Minimalism can be the perfect solution for any space, adding sophistication and unique character. Mandal harmonises perfectly with any type of building, but particularly in the galvanised version matches perfectly modern or industrial style.





# Mandal



**Colour:**



Black



Galvanized


**Colour temperature:**

2700K

4000K



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Product Eco-friendly.

**Accessories:**


**Art. 130**


Corner bracket  
Art.1373, 1374



**Art. 149**

Corner bracket  
Art.1370, 1371





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1370BL	LED GU10	7,8W	500lm	2700K	40 000h	Dimmable
1370GA						
1371BL	LED GU10	-	-	-	-	-
1371GA						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1373BL	LED GU10	3,9W	250lm	2700K	40 000h	Dimmable
1373GA						
1374BL	LED GU10	-	-	-	-	-
1374GA						





# Paris

Fashionable and elegant as a Parisian - a wall fixture that combines minimalist, industrial design and excellent functionality. Ideal for illuminating buildings and fence posts. Paris is also perfect for illuminating a house number plate. Four colour options allow for perfect match with any surroundings, both copper and galvanised versions will add exceptional character to any façade.

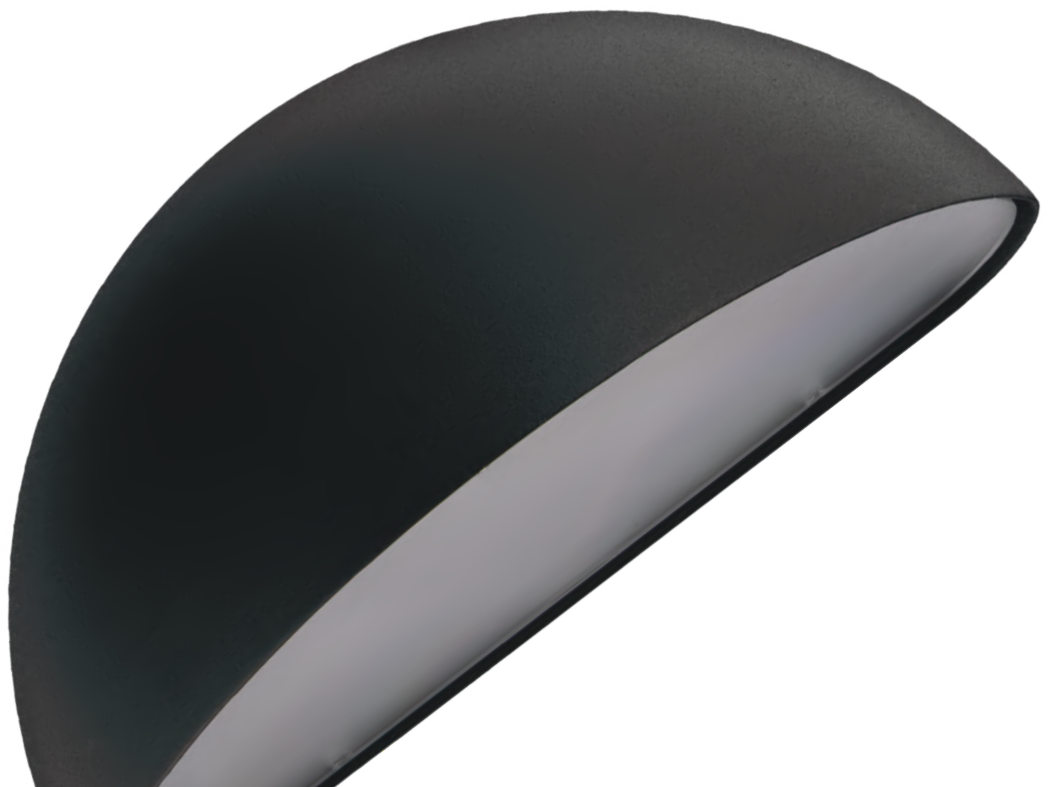



# Paris




**Colour:**

- Black
- Copper
- Galvanized
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
160BL	E27	-	-	-	-	-
160CO						
160GA						
160WH						
1495BL	LED	5,2W	508lm	3000K	> 70 000h	Dimmable
1495GA						
1495WH						
5038BL		5,4W	476lm	4000K		
5038GA						
5038WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
163BL	E27	-	-	-	-	-
163GA						
163WH						
1496BL	LED	5,2W	471lm	3000K	> 70 000h	Dimmable
1496GA						
1496WH						
5039BL		5,4W	438lm	4000K		
5039GA						
5039WH						

# Paris Big



**Colour:**



Black



White




Galvanized

**Colour temperature:**

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.





# Ski



**Colour:**

- Black
- Galvanized

**Colour temperature:**


2700K 4000K




Some of our lamps offer the possibility of energy distribution, allowing additional appliances or other lighting elements to be connected.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control
1392BL	LED	5,2W	346lm	3000K	> 70 000h	Dimmable
1392GA						
5113BL						
5113BGA						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Light Control	Socket Type
1390BL	LED	5,2W	371lm	3000K	> 70 000h	Dimmable	F(SCHUKO)
1390GA							





# Vansbro



**Colour:**

- Black
- Copper
- Galvanized

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 153**

Mounting corner.



**Art. 159**

Luminaire mounting distance.





Art	Type of light source
1920BL	
1920CO	E27
1920GA	

# Chelsea

Chelsea is craftsmanship, perfect workmanship and hand-blended polished copper, the result is a distinguished lighting charm. The exclusive Chelsea family offers traditional design and exceptional aesthetics. All the luminaires in the wide range are ideal for lighting entrances, terraces, walkways, driveways, gardens, fence posts. The unique style of these lamps will satisfy even the most demanding customers. An important feature of Chelsea to bear in mind that in natural weather conditions the bodies are covered with a noble patina.





# Chelsea




Colour:

 Copper

Colour temperature:


2700K 4000K

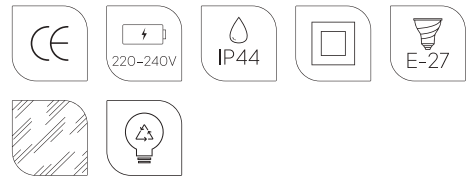

Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Handmade product (artisanal method).



Art	Type of light source
950CO	E27




Art	Type of light source
962CO	E27



Art	Type of light source
963CO	E27



# Chelsea & Chelsea Big

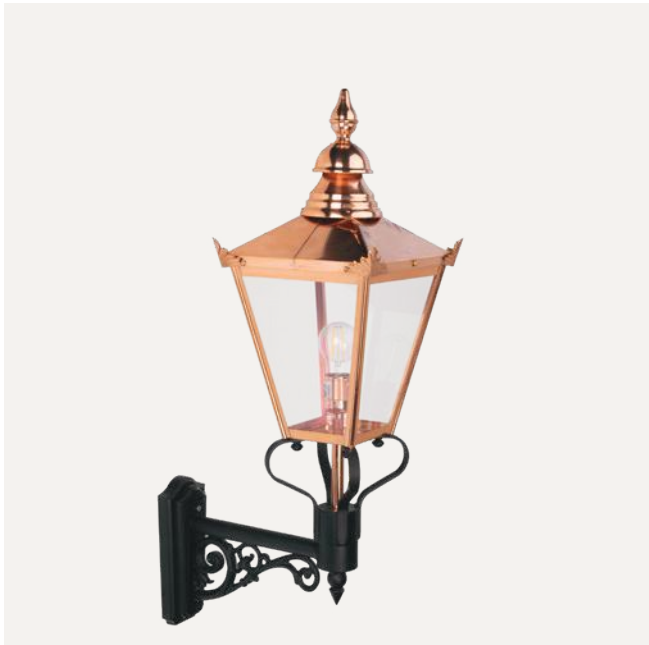


Colour:

 Copper

Colour temperature:


2700K 4000K

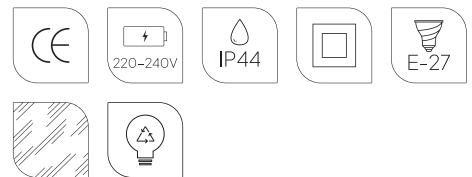

Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

## Accessories:


### Art. 152

Mounting corner.  
For Art. 954, Art. 960





Art	Type of light source
955CO	E27



Art	Type of light source
964CO	E27



Art	Type of light source
954CO	E27



Art	Type of light source
960CO	E27







# Chelsea & Chelsea Big




Colour:

 Copper

Colour temperature:


2700K 4000K

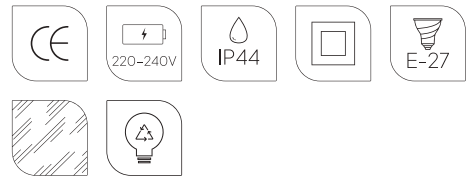Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

## Accessories:

### Art. 307

Concreting anchor.





Art	Type of light source
941CO	E27



Art	Type of light source
957CO	E27




Art	Type of light source
940CO	E27



Art	Type of light source
956CO	E27

# Chelsea

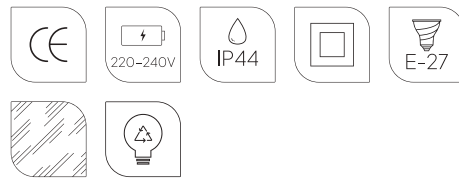

**Colour:**

 Copper

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Handmade product (artisanal method).



Art	Type of light source
961CO	E27






Art	Type of light source
951CO	E27



Art	Type of light source
953CO	E27



# Chelsea

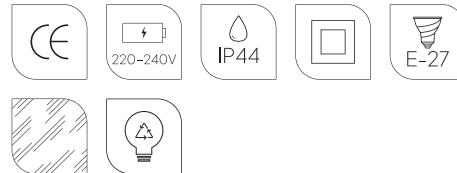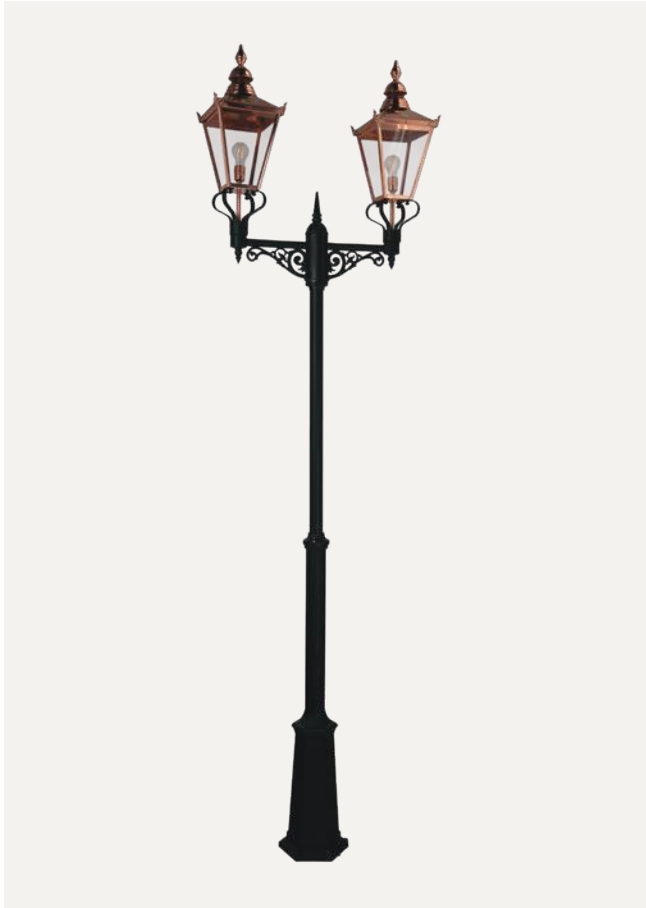


Colour:

 Copper

Colour temperature:

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Handmade product (artisanal method).

## Accessories:


### Art. 305

Concreting anchor.




### Art. 306

Ground anchor.




### Art. 108

Anchoring support.






Art	Type of light source
310BL	E27
310WH	



Art	Type of light source
311BL	E27
311WH	



Art	Type of light source
360BL	E27
360WH	



Art	Type of light source
361BL	E27
361WH	



# Bologna



Colour:

Black

White

Colour temperature:

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 152

Mounting corner





# Bologna



Colour:

Black

White

Colour temperature:

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

Accessories:


Art. 307

Mounting corner





Art	Type of light source
312BL	E27
312WH	



Art	Type of light source
313BL	E27
313WH	



Art	Type of light source
314BL	E27
314WH	





Art	Type of light source
315BL	E27
315WH	





# Bologna



**Colour:**

- Black
- White

**Colour temperature:**

2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 108**

Anchoring support.




**Art. 305**

Concreting anchor.



**Art. 306**

Ground anchor.





Art	Type of light source
362BL	E27
362WH	



Art	Type of light source
363BL	E27
363WH	



Art	Type of light source
364BL	E27
364WH	



Art	Type of light source
365BL	E27
365WH	








Art	Type of light source
370BL	E27
370WH	



# Como

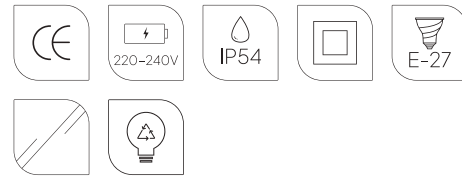

**Colour:**

Black

White

**Colour temperature:**

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.






Art	Type of light source
375BL	E27
375WH	



# Como

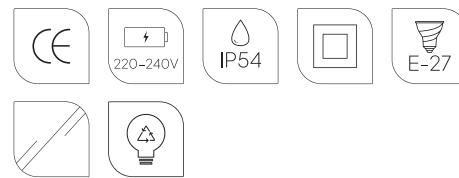

**Colour:**



**Colour temperature:**

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 307**

Concreting anchor.





# Como



Colour:

- Black
- White

Colour temperature:


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

## Accessories:


### Art. 108

Anchoring support.




### Art. 305

Concreting anchor.



### Art. 306

Ground anchor.



# Como



Art	Type of light source
371BL	E27
371WH	




Art	Type of light source
372BL	E27
372WH	



Art	Type of light source
373BL	E27
373WH	



# Florence

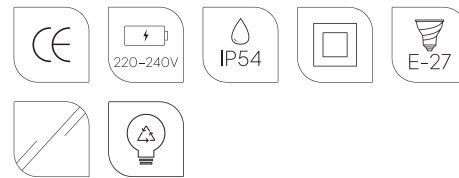

**Colour:**


Black

White

**Colour temperature:**

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.






Art	Type of light source
800BL	E27
800WH	



# Florence

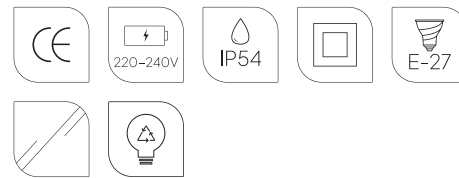

Colour:

Black

White

Colour temperature:

2700K


4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source
800A/BL	E27
800A/WH	



# Florence

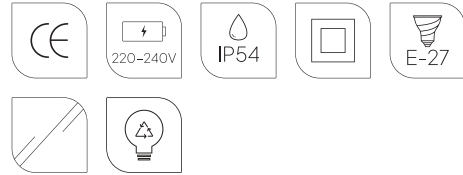

**Colour:**

Black

White

**Colour temperature:**

2700K


4000K




Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
805BL	E27
805WH	E27

**Accessories:**

**Art. 307**

Concreting anchor.





Art	Type of light source
810BL	E27
810WH	




Art	Type of light source
820BL	E27
820WH	



Art	Type of light source
830BL	E27
830WH	

# Florence



**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 108**

Anchoring support.




**Art. 305**

Concreting anchor.



**Art. 306**

Ground anchor.







# Genoa & Genoa Mini




**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K

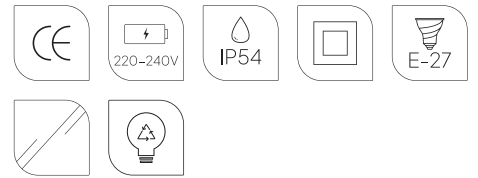

Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
170BL	E27
170WH	



Art	Type of light source
175BL	E27
175WH	



# Glasgow

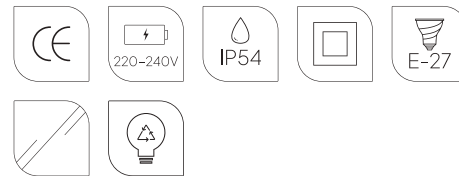

**Colour:**

- Black
- White


**Colour temperature:**



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.



Art	Type of light source
730BL	E27
730WH	



# London

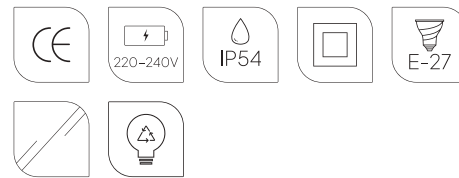

**Colour:**

- Black
- White


**Colour temperature:**



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
497BL	E27
497WH	



# London Big



**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.





Art	Type of light source
490BL	E27
490WH	



Art	Type of light source
493BL	E27
493WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4116BL	LED	9,5W	757lm	3000K	50 000h
4116WH					
4117BL			805lm	4000K	
4117WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4118BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4118WH						
4119BL			1767lm	4000K		
4119WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4136BL	LED	9,5W	757lm	3000K	50 000h
4136WH					
4137BL			805lm	4000K	
4137WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4138BL	LED	14,6W	1716lm	3000K	50 000h	IESNA type V
4138WH						
4139BL			1767lm	4000K		
4139WH						



# London



**Colour:**

- Black
- White

**Colour temperature:**


2700K                      4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 152**

Mounting corner.





Art	Type of light source
480BL	E27
480WH	



Art	Type of light source
481BL	E27
481WH	



# London & London Big



**Colour:**

- Black
- White

**Colour temperature:**


2700K      4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
493A/BL	E27
493A/WH	



Art	Type of light source
481A/BL	E27
481A/WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4140BL	LED	17,5W	1392lm	3000K	50 000h	-
4140WH				4000K		
4141BL						
4141WH		30000K				
4142BL		14,6W	1716lm	IESNA type V		
4142WH						



Art	Type of light source
484BL	E27
484WH	



Art	Type of light source
485BL	E27
485WH	



Art	Type of light source
494BL	E27
494WH	



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4144BL	LED	9,3W	756lm	3000K	50 000h
4144WH					

# London & London Big




**Colour:**

- Black
- White

**Colour temperature:**


2700K      4000K

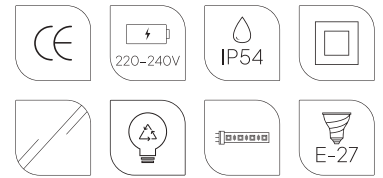

Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 307**

Concreting anchor.





# London & London Big



Colour:

- Black
- White

Colour temperature:


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

## Accessories:


### Art. 108

Anchoring support.




### Art. 305

Concreting anchor.



### Art. 306

Ground anchor.





Art	Type of light source
482BL	E27
482WH	



Art	Type of light source
483BL	E27
483WH	



Art	Type of light source
491BL	E27
491WH	



Art	Type of light source
492BL	E27
492WH	



Art	Type of light source
495BL	E27
495WH	





Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4124BL	LED	17,5W	1392lm	3000K	50 000h
4124WH				4000K	
4125BL					
4125WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4128BL	LED	19W	1514lm	3000K	50 000h
4128WH				4000K	
4129BL			1514lm		
4129WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50
4132BL	LED	28,5W	2271lm	3000K	50 000h
4132WH				4000K	
4133BL			2271lm		
4133WH					



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4126BL	LED	14,6W	1716lm	3000K	> 120 000h	IESNA type V
4126WH				4000K		
4127BL			1767lm	4000K		
4127WH						




Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4130BL	LED	29,2W	3422lm	3000K	> 120 000h	IESNA type V
4130WH				4000K		
4131BL			3534lm	4000K		
4131WH						



Art	Type of light source	Watt	Luminous flux	Colour temperature	L70/B50	Lens
4134BL	LED	43,8W	5148lm	3000K	> 120 000h	IESNA type V
4134WH				4000K		
4135BL			5301lm	4000K		
4135WH						

# Latina



**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
105BL	E27
105WH	



# Modena




**Colour:**

- Black
- White

**Colour temperature:**


2700K                      4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
350BL	E27
350WH	




Art	Type of light source
351BL	E27
351WH	

**Accessories:**

**Art. 152**  
Corner bracket



# Modena Big



**Colour:**

- Black
- White

**Colour temperature:**


2700K                      4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.




Art	Type of light source
380BL	E27
380WH	



Art	Type of light source
381BL	E27
381WH	

**Accessories:**

**Art. 152**  
Cornerbracket



# Modena & Modena Big




**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K

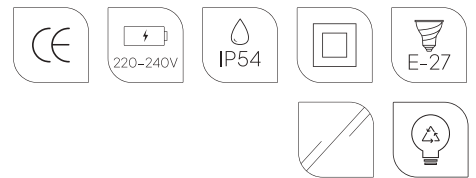

Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
381A/BL	E27
381A/WH	




Art	Type of light source
351A/BL	E27
351A/WH	





# Modena & Modena Big

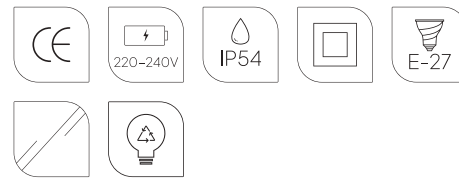

**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 307**

Concreting anchor.





Art	Type of light source
304BL	E27
304WH	



Art	Type of light source
300BL	E27
300WH	




Art	Type of light source
384BL	E27
384WH	





# Modena



**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 305**

Concreting anchor.




**Art. 306**

Ground anchor.



**Art. 108**

Anchoring support.





Art	Type of light source
302 BL	E27
302 WH	



Art	Type of light source
303 BL	E27
303 WH	

# Modena Big



**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K




Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 305**

Concreting anchor.




**Art. 306**

Ground anchor.



**Art. 108**

Anchoring support.





Art	Type of light source
301BL	E27
301WH	




Art	Type of light source
382BL	E27
382WH	



Art	Type of light source
397BL	E27
397WH	



# Venice

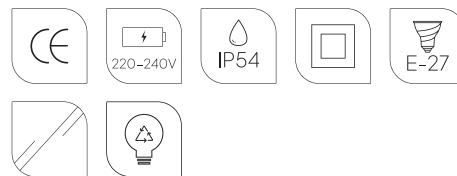

**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.



Fully replaceable electrical kit.



Art	Type of light source
261BL	E27
261WH	



# Rimini




**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K

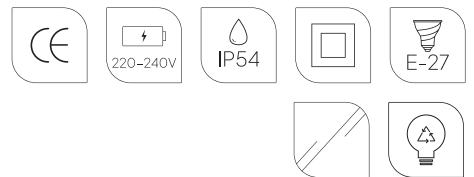

Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**

**Art. 307**

Concreting anchor.





Art	Type of light source
250BL	E27
250WH	



Art	Type of light source
404BL	E27
404WH	




Art	Type of light source
259BL	E27
259WH	



Art	Type of light source
259IBL	E27
259IWH	

# Rimini



**Colour:**

- Black
- White

**Colour temperature:**


2700K 4000K



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 150**

Corner bracket






# Rimini/Milano



**Colour:**

- Black
- White


**Colour temperature:**



Product Eco-friendly.



Luminaire suitable for extreme conditions.




Fully replaceable electrical kit.

**Accessories:**


**Art. 405**

Concreting anchor.



**Art. 406**

Ground anchor.





Art	Type of light source
401BL	E27
401WH	



Art	Type of light source
402BL	E27
402WH	



Art	Type of light source
403BL	E27
403WH	



# Poles



Art. 1277

Art. 1275

Art. 1273

Art. 3009

Art. 3011

Colour:

- Aluminium
- Black
- Graphite
- White

Colour:

- Aluminium
- Black
- Graphite
- White

Colour:

- Aluminium
- Black
- Graphite
- White


Colour:

- Galvanized

Colour:

- Black
- White

# Poles

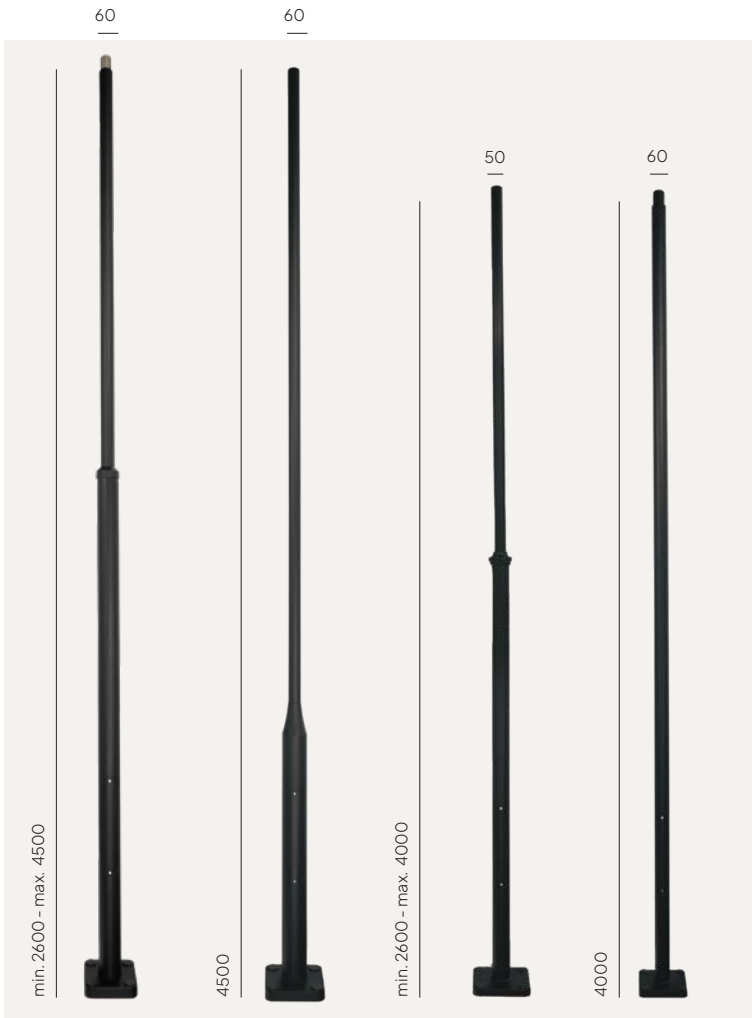

Art. 3004






Art. 2000

Art. 1255

Art. 1257

Art. 3005

Art. 3005 Includes concreting anchor.

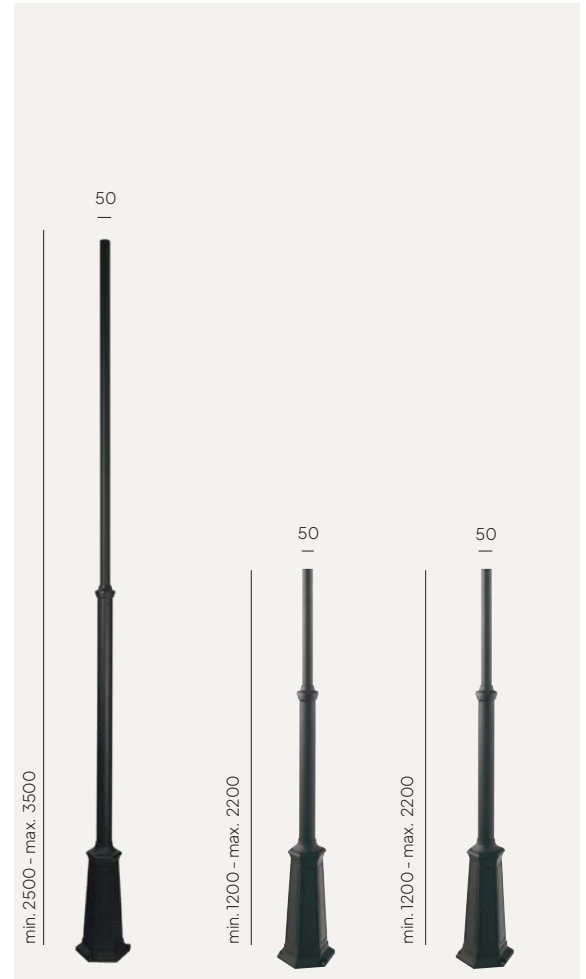

Art. 30101

Art. 3013

Art. 3010

Art. 3013 includes terminal.

Colour:



Colour:




Colour:




Colour:




Colour:



Colour:



Colour:



# Icons

## Product Characteristics

Luminaire with socket for replaceable light source (GU10, E-27, E-14)



Luminaire with socket for interchangeable light sources.



LED luminaire

Luminaire equipped with LED module



Voltage 220-240V



## Control

Motion sensor

Luminaire equipped with a motion sensor.



DIM dimmable version

Phase dimmable luminaire



DALI light control



Light control in the D4i system



## Security

CE/ENEC Certificates

CE - Manufacturer's declaration that a labelled product complies with the requirements of the EU's so-called 'New Approach' directive



ENEC - European Standards for the Certification of Electrical Equipment (ENEC) regulates the certification of lamps, office equipment and components such as switches and cables. To receive ENEC certification, products must comply with the applicable European standards. A quality management system must also be applied to the production processes.

Protection class (I, II, III)

Protection class I/ Luminaire with protective conductors.



Protection class II/protection by double or reinforced insulation.




Protection class III/low voltage protection.



## Security

IP

IP rating, determines whether the electrical equipment is suitable for various environmental conditions

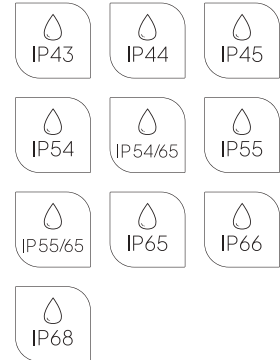

IK

The IK shock resistance level is a measure of the resistance of electrical equipment enclosures to mechanical stress, particularly impact stress



## Connection / application

Specified inrun strength (for recessed luminaires)

Overrun luminaire (for vehicles with pneumatic tyres)



Length of cable with plug or length of cable with open end



## Light emission


Light (up, down)

Determination of the direction of the light beam emission



Light (narrow down - wide up, narrow up, etc.)

Determination of the direction and angle of the light beam emission








Swivel and tilt range




Adjustable light direction




Main and visual materials used

Steel	
Stainless steel	
Aluminium	
Copper	
Wood	


Type of lens

Toughened/safe glass Protection class I/ Luminaire with protective conductors.	 
Plastic The luminaire uses a plastic diffuser.	


Special icons



Natural Scandinavian wood.  
We use only high-quality, natural Scandinavian wood, which adds warmth and elegance to the lamps. The natural Scandinavian wood used in the fittings refers to the Nordic style, its naturalness, lightness and subtlety.




Luminaires with energy distributor option.adjustment.  
Some of our lamps offer the possibility of energy distribution, allowing additional appliances or other lighting elements to be connected.



Fully replaceable electrical kit.  
If required, our lamps allow for easy replacement of electrical components, ensuring a longer product life.



Handmade product (artisanal method).  
Each lamp is meticulously hand-crafted using traditional craftsmanship methods to guarantee its unique character. The power of craftsmanship



Multiple light variants.adjustment.  
We offer a variety of lighting modes, from soft light to strong illumination, adapting to different lighting needs.




Vandal-resistant luminaire.  
Our lamps are robustly manufactured and vandal-resistant, making them an ideal choice for public areas.



Product Eco-friendly.  
We care about the environment. Our products are environmentally friendly and manufactured with minimal environmental impact in mind.



Luminaire suitable for extreme conditions.  
The lamp's construction is resistant to extreme weather conditions, from frost to heat, guaranteeing its durability



Wide range of light direction  
Our lamps are equipped with an adjustable head, allowing the direction of light to be set precisely according to individual needs.



Double corrosion protection (galvanising+powder coating).  
Each lamp is protected against corrosion twice, first by galvanising and then by powder coating. This guarantees its longevity and resistance to weathering.






Energy under control (mainly energy-saving solutions - control, dimming, motion-dusk sensor).  
Our garden lights offer advanced energy control features that allow significant savings. Features such as light dimming, motion sensor and twilight sensor ensure that the light shines only when it is needed

---



Norlys AS  
P.B 1014 Hoff, 0218 Oslo  
Hovfaret 4B, 0275 Oslo  
Norway

 +47 24 12 40 10  
 [www.norlys.com](http://www.norlys.com)  
 [firmapost@norlys.no](mailto:firmapost@norlys.no)